



Aug 2018
Power Expert



HENGFU SWITCHING Power Supply

Sales Network

公司直属办事处:

Beijing 北京

北京市知春路 132 号中发电子大厦 2069 号
Tel: 010-62642265, 62642226

Chengdu 成都

成都市花圃路 1 号大成安防电子市场负 1 楼 C 区 205A
Tel: 028-83230557

Guangzhou 广州

广州市天河路龙苑大厦新赛格电子城二楼 296F 房
Tel: 020-87501601

Hangzhou 杭州

杭州市登云路 639 号杭州电子市场 1A020 房
Tel: 0571-89901020

Ji'nan 济南

济南市北园路 398 号时代欧亚电子大厦 1F140 房
Tel: 0531-86117674

Nanjing 南京

南京市江宁区胜太路 11 号胜太电子城 1 楼 B066 房
Tel: 025-86644513

Shanghai 上海

上海市北京东路 668 号赛格电子市场 1B11 房
Tel: 021-61209211

Shenyang 沈阳

沈阳市万柳塘路 56 号南塔电子商场三楼 212 房
Tel: 024-24150659

Shenzhen 深圳

深圳市华强北路 1015 号华强电子市场二楼 21C113 房
Tel: 0755-83291934
深圳市华强北路赛格电子市场二楼 2103 房
Tel: 0755-83687772
深圳市华强北路赛格电子市场二楼 2000A
Tel: 0755-83682454

Suzhou 苏州

苏州市滨河路 588 号赛格电子市场 1B77 房
Tel: 0512-68052622

Wuhan 武汉


武汉市前进四路 72 号美好太和数码电子市场二楼 20 号
Tel: 027-82844744

Xi'an 西安

西安市长安北路 40 号国际电子商城三楼 1 号房
Tel: 029-85222109

Zhengzhou 郑州

郑州市经济技术开发区航海东路第七大街宏光合园 1 单元 2507 室
Tel: 0371-55917207

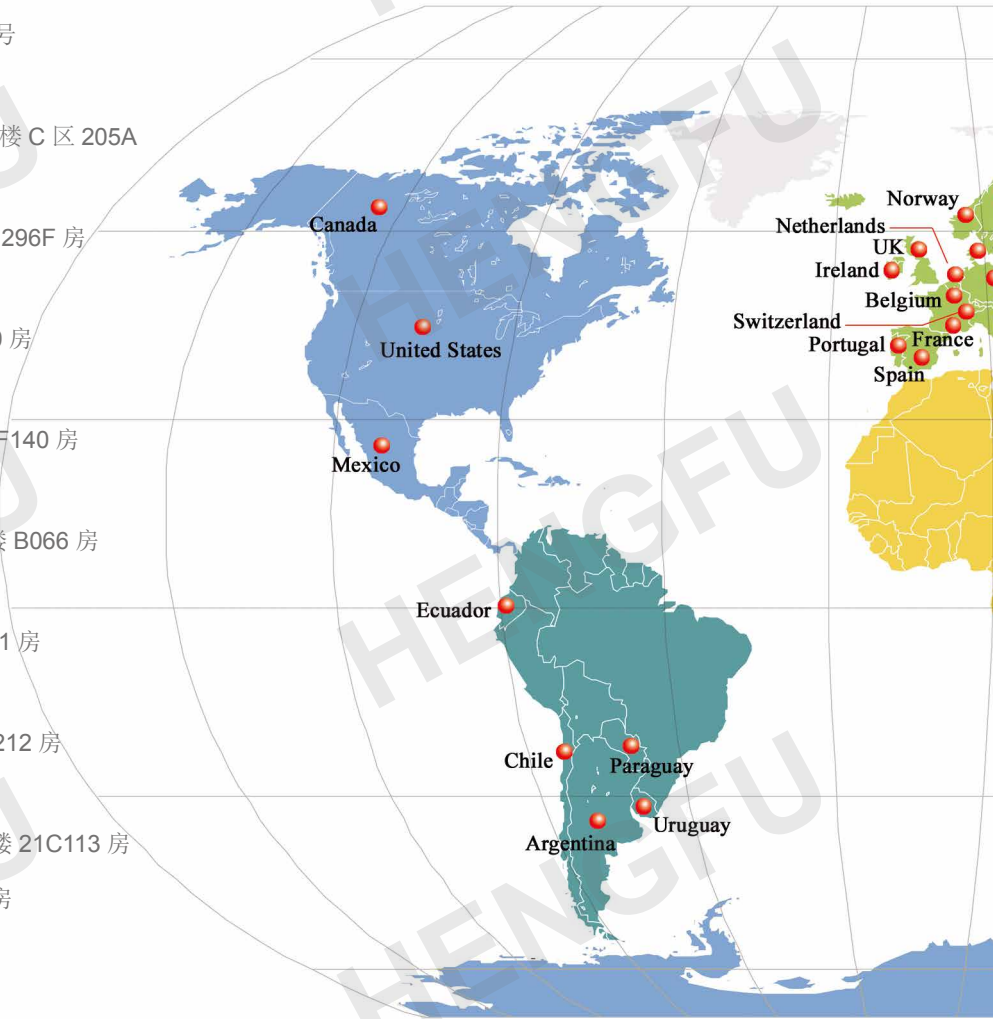

上海总部 Headquarter



车间 Workshop



仓库 Warehouse



会议室 Meeting Room



Europe

Belarus
Belgium
Bosnia & Herzegovina
Czech Republic
Denmark
Finland
France
Germany
Greece
Hungary
Ireland
Italy
Latvia
Luxembourg
Netherlands
Norway
Poland
Portugal
Romania
Russia
Slovenia
Spain
Sweden
Switzerland
Turkey
UK
Ukraine

Oceania

Australia
New Zealand

Africa

Benin
Nigeria
South Africa
Tunisia

Asia

Bangladesh
Egypt
Hong Kong
India
Indonesia
Iran
Israel
Japan
Korea
Macao
Malaysia
Pakistan
Philippines
Singapore
Taiwan
Thailand
United Arab Emirates
Vietnam

North America

Canada
Mexico
United States

South America

Argentina
Bolivia
Brazil
Chile
Colombia
Cuba
Ecuador
Paraguay
Uruguay



Electronica, Munich



ExpoElectronica, Moscow



ElectronicAsia, Hong Kong



China Electronics, Shanghai



上海厂区 Shanghai Factory



安徽厂区 Anhui Factory

公司重要项目
Important Projects



北京奥运会 Beijing Olympic Games



光伏发电 Photovoltaics



激光设备 Laser equipment



国庆 60 周年阅兵式 60th Anniversary

公司简介

衡孚企业创始于 1992 年，是国内最具规模的全系列工业开关电源专业生产厂商。公司投资建造的工厂位于上海松江区，占地面积 25 亩，厂房面积 13000m²。2016 年 7 月，在安徽成立安徽衡孚电子科技有限公司，投资建设安徽工厂生产基地，占地面积 100 亩，已经建设完成的一期厂房面积 21000m²，二期建设厂房面积 40000m²。产品系列从 5W 到 2400W，5000 余种规格为客户提供了极大的灵活性。产品涵盖 AC/DC 和 DC/DC 标准品、PFC 电源、基板型电源、充电电源、导轨安装式电源、LED 电源及特殊定制品。“衡孚”在中国已被业界公认为开关电源的领导品牌，并日益成为全球瞩目的知名品牌。

公司通过权威认证机构 SGS 公司 ISO9001 质量体系认证，现已有 50 多个产品系列通过 UL, TUV, CB, CE 和 CCC 认证。我们拥有各类先进的生产和检测设备，如全自动波峰焊和回流焊设备、松下高速自动插件机、全自动点胶机、贴片机、开关电源自动测试系统、ROHS 光谱分析仪、EMC 测试系统、环境试验箱、程控恒温老化房、数据采集仪等。产品关键部件均采用世界一流品牌的元器件，以确保电源的长寿命和高可靠性。凭借优异的品质和品牌知名度，衡孚成为 2008 北京奥运会“鸟巢”国家体育场、2009 国庆六十周年天安门 LED 全彩巨屏及 2010 上海世博会各场馆的电源供应商。

凭借二十多年专业从事开关电源研发和制造的经验，我们已与全球几百家大中型企业建立了长期合作关系，分别涉及工业控制、通信、LED 显示屏及灯饰亮化工程、电梯设备、激光设备、广播电视、计算机网络、医疗器械、智能监控、车载系统、金融设备等各个重要领域，其中有很多是上市公司及世界 500 强企业。我们专业的销售队伍——遍布北京、上海、深圳、广州、西安、成都、武汉、沈阳、济南、南京、杭州、苏州、郑州等中国各大中型城市的 15 个办事处及遍布全球的经销商，将随时为您提供专业的技术支持和迅捷的售后服务。我们拥有强大的研发队伍，将竭诚为您提供最佳的电源解决方案，并成为您最值得信赖的合作伙伴！



贴片回流焊 SMD/Reflow Soldering



自动插件 Automatic Insertion



波峰焊 Wave Soldering



ICT 测试 In-Circuit Test



研发中心 R&D Center



新品开发 Product Development



EMI 测试 EMI Test



EMS 测试 EMS Test



环境试验 Environmental Test

Company Profile

Hengfu Corporation, founded in 1992, is recognized as the leading manufacturer of industrial switching power supplies in China. Our headquarter in Shanghai is located in Songjiang district which covers an area of 1.6 hectares, factory building 13000m². We invested a new factory in Anhui province with total area of 6.6 hectares. Finished factory area is 21000m², and 2nd phase 40000m² is under progress. Our product range includes AC/DC & DC/DC standard, PFC, open frame, battery charger, din rail, LED driver and custom-design switching power supplies, containing over 5000 models with a great variety.

The company is ISO9001 certified by SGS. Over 50 product series have acquired UL, TUV, CB, CE & CCC approval, and more are underway. We have various advanced equipment, such as wave soldering and reflow soldering machine, Panasonic high-speed AI machine, automatic dispenser, chip placer, ATE, ICT, ROHS testing, environmental testing, EMC testing system, burn-in test room, data acquisition, etc. Only top international brand components are adopted for the key parts to ensure long lifetime and high reliability. With high quality and market reputation, we were honoured to become main SMPS supplier for Beijing Olympic Games, 60th National anniversary ceremony and Shanghai Expo2010. 'Hengfu' is a well-known brand in China, and obtains increasing reputation in the world market.

With over 20 years experience in design and manufacture of switching power supplies, we have established long-term relationship with hundreds of big customers in the field of industrial control, telecom, LED display & lighting of buildings, elevator, laser equipment, TV & broadcasting, computer system, medical equipment, safety control, automotive system, banking equipment, etc. Our countrywide sales team - 15 branch offices and worldwide distributors are ready to offer you professional technical support and prompt service.

We sincerely welcome you to visit our website www.hengfu.com for more details. We are confident to offer you total power solution and become your trustworthy power partner.



ATE 测试 Automated Test



耐压测试 Hi-pot Test



恒温老化 Constant Temp. Burn-in



终检 Final Test

Index 目录

AC/DC Enclosed LM Series - LM 超薄系列



HF35W/ 50W/ 75W/ 100W/ 150W-LSM, HF200W/ 350W-FSM 01



AC/DC Enclosed E Series - E系列

HF25W/ 35W/ 55W/ 75W/ 100W/ 150W/ 200W/ 350W-SE 02
HF35W-DE/ TE, HF55W-DE/ TE, HF75W-DE/ TE, HF100W-DE 03

Special Purpose Product - 特殊用途电源

HF80W-SDW, HF150W-SHW, HF150W-SDW, HF150W-SW 04
HF55W/ 100W/ 150W-D-L, HF300W-DM-L, HF300W-QV-A 05
HF240W-S-27, HF350W-SE-48, HF500W-QV-A, HF500W-QL-A 05

AC/DC Enclosed Standard & PFC Series - 单路输出常规系列

HF10W-SL, HF20W-SL, HF25W-SL, HF40W-SL, HF60W-SL 06
HF70W-SL, HF100W-SF, HF150W-SF, HF240W-SF, HF350W-SF 07
HF75W/ 100W/ 150W/ 200W/ 320W/ 480W-SC (PFC Series) 08
HF150W-LSC, HF200W-LSC, HF320W-LSC, HF500W-LSC (PFC Series) 09
HF10W/ 20W/ 35W/ 55W/ 70W/ 100W/ 150W-S 10
HF240W/ 300W/ 350W/ 400W/ 500W~1000W-S 11

AC/DC Enclosed SM Series - SM 超小系列

HF15W/ 25W/ 35W/ 50W/ 75W-SSM, HF100W/ 150W-SMF 12

AC/DC Enclosed M Series - M小体积系列

HF30W-SM, HF150W-SM, HF350W-SM, HF500W/ 600W/ 1000W-SM 13

AC/DC Enclosed Standard Multi. Output - 多路输出常规系列

HF10W-DL, HF20W-DL, HF40W-DL, HF60W-DL 14
HF70W-DF, HF100W-DF, HF10W-TL, HF20W-TL 15
HF40W-TL, HF60W-TL, HF70W-TF, HF100W-TF 16
HF10W-D, HF20W-D, HF35W-D, HF55W-D, HF70W-D 17
HF100W-D, HF150W-D, HF200W-D, HF300W-D, HF400W-D 18
HF10W-T, HF20W-T, HF35W-T, HF55W-T 19
HF70W-T, HF100W-T, HF150W-T, HF300W-T 20
HF35W-Q, HF55W-Q, HF100W-Q, HF150W-Q 21

Battery Charger & DIN Rail Series - 充电及导轨电源系列

HF15W-SB, HF20W-SB, HF40W-SB, HF55W-SB 22
HF55W-D-U, HF100W-SB, HF155W-SB, HF15W-SDR 23
HF30W-SDR, HF50W-SDR, HF75W-SDR, HF120W-SFDR 24
HF120W-SDR, HF150W-SDR, HF150W-WDR, HF240W-SDR 25

Rain-proof & Telecom Series - 防雨及通信电源系列

HF100W-YS, HF200W-YS, HF350W-YS, HF400W-YS, HF500W-YS 26
HF40W-ST, HF70W/ 100W/ 150W/ 200W/ 300W/ 400W-ST/ DT 27

LED Driver Series - LED 电源系列

HF20W-PLD, HF35W-PLD, HF60W-PLD, HF20W-PLV 28
HF35W-PLV, HF60W-PLV 29

Open Frame Series - 基板型电源系列

HF5W-SPL, HF15W-SPL 29
HF15W-SPM, HF25W-SPL, HF35W-SPL, HF50W-SPL 30
HF45W-SPL/ DPL/ TPL, HF65W-SPL/ DPL/ TPL 31
HF100W-SPC, HF100W-SPF, HF150W-SUF, HF200W-SPC 32
HF50W~60W-SUD, HF60W-SP, HF100W-SUD 33

DC/DC Enclosed Standard Series - 直流输入电源系列

HF10W~1000W DC/DC 34~36

Drawing & Instructions - 图纸及产品使用说明

37~41



LM Series



SM & E Series



AC/DC, DC/DC Standard



PFC Series



Din Rail & Battery Charger



LED Driver & Rain-proof Series



Open Frame Series

35W~350W Single Output LM Series



Features:

- Universal AC input / full range
- Supper slim series, 30mm height, high reliability
- Built-in EMI filter
- Top international brand components for key parts
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty

Product picture										
	F605LSM	F605LSM	F6075LSM	F610LSM	F615LSM	F635LSM	F635LSM			
Model No.	HF35W-LSM	HF50W-LSM	HF75W-LSM	HF100W-LSM	HF150W-LSM	HF200W-FSM	HF350W-FSM			
Dimension (mm)	99×82×30	99×82×30	99×97×30	129×97×30	159×97×30	215×115×30	215×115×30			
Weight & packing (/CTN)	0.22kg/pcs, 72pcs	0.23kg/pcs, 72pcs	0.25kg/pcs, 60pcs	0.32kg/pcs, 40pcs	0.40kg/pcs, 32pcs	0.63kg/pcs, 20pcs	0.68kg/pcs, 20pcs			
AC input voltage range	85~264VAC (120~370VDC)					90-132/180-264VAC selected by switch				
Input frequency	47~63Hz									
Inrush current	cold start, 45A/230VAC		cold start, 50A/230VAC			cold start, 60A/230VAC				
Input leakage current	< 1mA/ 230VAC					< 2mA/ 230VAC				
Line regulation (full load)	≤ ± 0.5%									
Voltage adjust range	± 10%									
Overload protection	105~150%, hiccup mode, auto recovery					105~140%, hiccup mode, auto recovery				
Over voltage protection	115~150%, shut off, re-power on to recover					115~150%, hiccup mode, auto recovery				
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min									
Rise time	50ms@full load (typical)									
Hold up time	20ms@full load (typical)									
Operating temperature	-30℃~+70℃ (refer to the derating curve)									
Safety standards	GB4943, UL62368-1, UL60950, EN60950									
EMC standards	GB9254, EN55022 class B, EN55024, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11									
Cooling method	convection						fan			

35W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF35W-LSM-3.3	3.3V	7.0A	2.0%	80mV	70%
HF35W-LSM-5	5V	7.0A	1.0%	80mV	70%
HF35W-LSM-12	12V	3.0A	0.5%	120mV	84%
HF35W-LSM-15	15V	2.4A	0.5%	120mV	84%
HF35W-LSM-24	24V	1.5A	0.5%	150mV	85%
HF35W-LSM-28	28V	1.3A	0.5%	200mV	85%
HF35W-LSM-36	36V	1.0A	0.5%	200mV	86%
HF35W-LSM-48	48V	0.8A	0.5%	200mV	87%

50W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF50W-LSM-3.3	3.3V	10.0A	2.0%	80mV	70%
HF50W-LSM-5	5V	10.0A	1.0%	80mV	70%
HF50W-LSM-12	12V	4.2A	0.5%	120mV	85%
HF50W-LSM-15	15V	3.4A	0.5%	120mV	85%
HF50W-LSM-24	24V	2.2A	0.5%	150mV	86%
HF50W-LSM-28	28V	1.8A	0.5%	150mV	86%
HF50W-LSM-36	36V	1.45A	0.5%	200mV	87%
HF50W-LSM-48	48V	1.1A	0.5%	200mV	88%

75W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF75W-LSM-3.3	3.3V	14.0A	2.0%	80mV	73%
HF75W-LSM-5	5V	14.0A	1.0%	120mV	82%
HF75W-LSM-12	12V	6.0A	0.5%	150mV	85%
HF75W-LSM-15	15V	5.0A	0.5%	150mV	86%
HF75W-LSM-24	24V	3.2A	0.5%	150mV	87%
HF75W-LSM-28	28V	2.7A	0.5%	150mV	87%
HF75W-LSM-36	36V	2.1A	0.5%	200mV	87%
HF75W-LSM-48	48V	1.6A	0.5%	200mV	88%

100W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF100W-LSM-5	5V	18.0A	1.0%	100mV	82%
HF100W-LSM-12	12V	8.5A	0.5%	120mV	86%
HF100W-LSM-15	15V	7.0A	0.5%	120mV	86%
HF100W-LSM-24	24V	4.5A	0.5%	150mV	87%
HF100W-LSM-36	36V	2.8A	0.5%	200mV	88%
HF100W-LSM-48	48V	2.3A	0.5%	200mV	89%

150W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF150W-LSM-5	5V	22.0A	1.0%	100mV	80%
HF150W-LSM-12	12V	12.5A	0.5%	150mV	85%
HF150W-LSM-15	15V	10.0A	0.5%	150mV	87%
HF150W-LSM-24	24V	6.5A	0.5%	200mV	87%
HF150W-LSM-36	36V	4.3A	0.5%	200mV	87%
HF150W-LSM-48	48V	3.3A	0.5%	200mV	88%

200W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF200W-FSM-3.3	3.3V	40.0A	2.0%	150mV	80%
HF200W-FSM-5	5V	40.0A	2.0%	150mV	80%
HF200W-FSM-12	12V	17.0A	1.0%	150mV	85%
HF200W-FSM-15	15V	14.0A	0.5%	150mV	86%
HF200W-FSM-24	24V	8.8A	0.5%	150mV	87%
HF200W-FSM-36	36V	5.8A	0.5%	200mV	87%
HF200W-FSM-48	48V	4.4A	0.5%	200mV	88%

350W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF350W-FSM-3.3	3.3V	60.0A	2.5%	150mV	80%
HF350W-FSM-5	5V	60.0A	2.0%	150mV	82%
HF350W-FSM-12	12V	29.0A	1.0%	150mV	83%
HF350W-FSM-15	15V	23.2A	0.5%	150mV	84%
HF350W-FSM-24	24V	14.6A	0.5%	150mV	86%
HF350W-FSM-36	36V	9.7A	0.5%	200mV	86%
HF350W-FSM-48	48V	7.3A	0.5%	200mV	87%



* Other output voltage also available, please send inquiry.

25W~350W Single Output E Series

Features:

- Economical design, competitive price
- Top international brand components for key parts
- Built-in EMI filter
- Compact size, high reliability

- Approvals: CE (LVD)
- Protections: overload/ over voltage/ short circuit/ over temperature (HF350W-SE)
- 2 years warranty

Product picture								
Model No.	HF25W-SE	HF35W-SE	HF55W-SE	HF75W-SE	HF100W-SE	HF150W-SE	HF200W-SE	HF350W-SE
Dimension (mm)	100×58×31	98.5×82×35	99×97×38	129×98×40	160×98×39	160×98×39	199×98×39	215×115×50
Weight & packing (/CTN)	0.15kg, 108pcs	0.24kg, 60pcs	0.27kg, 42pcs	0.38kg, 42pcs	0.43kg, 30pcs	0.41kg, 30pcs	0.53kg, 28pcs	0.89kg, 16pcs
AC input voltage range	170~264VAC (210~370VDC)							
Input frequency	47~63Hz							
Inrush current	cold start, 40A/230VAC							
Input leakage current	< 0.7mA/ 230VAC							
Line regulation (full load)	≤ ± 0.5%							
Voltage adjust range	± 10%							
Overload protection	built-in IC protection, hiccup mode, auto recovery			105~150%, hiccup mode, auto recovery				105~130%, shut off, re-power on to recover
Over voltage protection	clamping by zener diode			115~150%, hiccup mode, auto recovery				115~150% shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min							
Rise time	50ms							
Hold up time	20ms							
Operating temperature	-20°C~+70°C (refer to the derating curve)							
Safety standards	design meet GB4943, UL60950, EN60950							
Cooling method	convection							
	fan							

25W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF25W-SE-5	5V	5.0A	0.5%	80mV	70%
HF25W-SE-12	12V	2.0A	0.5%	120mV	81%
HF25W-SE-15	15V	1.6A	0.5%	120mV	82%
HF25W-SE-24	24V	1.0A	0.5%	150mV	84%
HF25W-SE-48	48V	0.5A	0.5%	150mV	85%

100W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SE-12	12V	8.5A	0.5%	120mV	81%
HF100W-SE-15	15V	7.0A	0.5%	120mV	82%
HF100W-SE-18	18V	5.6A	0.5%	150mV	83%
HF100W-SE-24	24V	4.5A	0.5%	150mV	83%
HF100W-SE-36	36V	3.0A	0.5%	150mV	84%
HF100W-SE-48	48V	2.1A	0.5%	150mV	85%

35W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF35W-SE-5	5V	7.0A	0.5%	80mV	77%
HF35W-SE-12	12V	3.0A	0.5%	120mV	81%
HF35W-SE-15	15V	2.4A	0.5%	120mV	81%
HF35W-SE-24	24V	1.5A	0.5%	150mV	83%
HF35W-SE-48	48V	0.7A	0.5%	150mV	85%

150W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SE-12	12V	12.5A	0.5%	120mV	82%
HF150W-SE-15	15V	10.0A	0.5%	120mV	82%
HF150W-SE-18	18V	8.3A	0.5%	150mV	82%
HF150W-SE-24	24V	6.3A	0.5%	150mV	83%
HF150W-SE-48	48V	3.1A	0.5%	150mV	84%

55W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF55W-SE-5	5V	10.0A	0.5%	80mV	73%
HF55W-SE-12	12V	4.6A	0.5%	120mV	80%
HF55W-SE-15	15V	3.7A	0.5%	120mV	80%
HF55W-SE-24	24V	2.3A	0.5%	150mV	83%
HF55W-SE-48	48V	1.2A	0.5%	150mV	84%

200W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF200W-SE-12	12V	16.7A	0.5%	120mV	82%
HF200W-SE-15	15V	13.3A	0.5%	120mV	83%
HF200W-SE-24	24V	8.3A	0.5%	150mV	84%
HF200W-SE-36	36V	5.6A	0.5%	150mV	84%
HF200W-SE-48	48V	4.2A	0.5%	150mV	84%

75W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF75W-SE-12	12V	6.3A	0.5%	120mV	82%
HF75W-SE-15	15V	5.0A	0.5%	120mV	83%
HF75W-SE-24	24V	3.0A	0.5%	150mV	84%
HF75W-SE-27	27V	2.6A	0.5%	150mV	84%
HF75W-SE-48	48V	1.5A	0.5%	150mV	85%

350W Single Output






Model	DC Output		Load regul.	R&N	Efficiency
HF350W-SE-5	5V	60.0A	0.5%	120mV	78%
HF350W-SE-12	12V	29.0A	0.5%	150mV	80%
HF350W-SE-15	15V	23.0A	0.5%	150mV	81%
HF350W-SE-24	24V	14.6A	0.5%	150mV	84%
HF350W-SE-36	36V	9.7A	0.5%	200mV	86%
HF350W-SE-48	48V	7.3A	0.5%	240mV	86%

* Other output voltage also available, please send inquiry.

35W~100W 2~3 Output E Series

Features:

- Economical design, competitive price
- Top international brand components for key parts
- Compact size, high reliability
- Free air cooling convection
- Protections: overload/ short circuit
- 2 years warranty

Product picture							
Model No.	HF35W-DE	HF55W-DE	HF75W-DE	HF100W-DE	HF35W-TE	HF55W-TE	HF75W-TE
Dimension (mm)	98.5×82×35	99×97×38	129×98×40	160×98×39	98.5×82×35	99×97×38	129×98×40
Weight & packing (/CTN)	0.26kg, 60pcs	0.29kg, 42pcs	0.40kg, 42pcs	0.45kg, 30pcs	0.28kg, 60pcs	0.31kg, 42pcs	0.42kg, 42pcs
AC input voltage range	170~264VAC (210~370VDC)						
Input frequency	47~63Hz						
Inrush current	cold start, 40A/230VAC						
Input leakage current	< 0.7mA/ 230VAC						
Line regulation (full load)	≤ ± 0.5%						
Voltage tolerance	V ₁ : ≤ ± 1%, V ₂ , V ₃ : ≤ ± 10%						
Voltage adjust range	V ₁ : ± 5% of rated output voltage						
Overload protection	105~150%, hiccup mode, auto recovery						
Withstand voltage	I/P -O/P: 1.5KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min						
Rise time	50ms						
Hold up time	20ms						
Operating temperature	-20°C~+70°C (refer to the derating curve)						
Safety standards	design meet GB4943, UL60950, EN60950						
Cooling method	convection						

35W Dual Output

Model	DC Output		R&N	Efficiency
HF35W-DE-B	5V	0.5~4.0A	80mV	76%
	12V	0.2~2.0A	120mV	
HF35W-DE-C	5V	0.5~4.0A	80mV	77%
	24V	0.1~1.0A	150mV	
HF35W-DE-D	12V	0.2~2.0A	120mV	78%
	12V	0.2~2.0A	120mV	

35W Triple Output

Model	DC Output		R&N	Efficiency
HF35W-TE-A	5V	0.5~3.5A	80mV	78%
	12V	0.1~1.2A	120mV	
	-12V	0.1~0.8A	120mV	
HF35W-TE-B	5V	0.5~3.5A	80mV	78%
	15V	0.1~0.8A	120mV	
	-15V	0.1~0.5A	120mV	
HF35W-TE-C	5V	0.5~3.5A	80mV	76%
	12V	0.1~1.2A	120mV	
	-5V	0.1~1.0A	100mV	

55W Dual Output

Model	DC Output		R&N	Efficiency
HF55W-DE-A	5V	0.5~6.0A	80mV	74%
	12V	0.2~2.5A	120mV	
HF55W-DE-B	5V	0.5~6.0A	80mV	77%
	24V	0.1~1.5A	150mV	
HF55W-DE-C	12V	0.2~2.3A	120mV	78%
	12V	0.2~2.3A	120mV	

55W Triple Output

Model	DC Output		R&N	Efficiency
HF55W-TE-A	5V	0.5~5.0A	80mV	78%
	12V	0.2~2.0A	120mV	
	-12V	0.2~1.5A	120mV	
HF55W-TE-B	5V	0.5~5.0A	80mV	78%
	15V	0.2~2.0A	120mV	
	-15V	0.1~1.0A	120mV	
HF55W-TE-C	5V	0.6~7.0A	80mV	76%
	12V	0.2~2.0A	120mV	
	-5V	0.1~1.5A	100mV	

75W Dual Output

Model	DC Output		R&N	Efficiency
HF75W-DE-A	12V	0.2~5.0A	120mV	78%
	12V	0.2~2.5A	120mV	
HF75W-DE-B	12V	0.2~5.0A	120mV	78%
	15V	0.2~2.0A	120mV	
HF75W-DE-C	12V	0.2~5.0A	120mV	79%
	24V	0.2~2.0A	150mV	


75W Triple Output

Model	DC Output		R&N	Efficiency
HF75W-TE-A	5V	0.5~6.0A	80mV	78%
	12V	0.2~2.0A	120mV	
	-12V	0.2~1.5A	120mV	
HF75W-TE-B	5V	0.6~7.0A	80mV	78%
	15V	0.2~2.0A	120mV	
	-15V	0.1~1.0A	120mV	
HF75W-TE-C	5V	0.7~8.0A	80mV	76%
	12V	0.2~2.0A	120mV	
	-5V	0.1~1.5A	100mV	

100W Dual Output

Model	DC Output		R&N	Efficiency
HF100W-DE-A	5V	2.0~15.0A	100mV	73%
	12V	0.5~5.00A	120mV	
HF100W-DE-B	5V	2.0~15.0A	100mV	74%
	15V	0.4~4.00A	120mV	
HF100W-DE-C	5V	2.0~15.0A	100mV	76%
	24V	0.3~3.00A	150mV	

80W DC/DC Photovoltaic Power Supply



New

- Wide input range up to 1600VDC
- High reliability
- Top brand components for key parts
- Protections: overload/ short circuit
- 5 years limited warranty
- 199 × 98 × 39(mm)

DC input voltage range.....300~1600VDC
 Input current< 1.0A/ 300VDC
 Line regulation (full load).....≤ ± 0.5%
 Output voltage adjust range.....26.73~28.35V
 Output overload protection.....> 3.6A delay 100~500ms shut off, re-power on to recover
 Withstand voltage.....I/P -O/P: 4.0KVAC/1min
 I/P -F/G: 3.0KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Isolation resistance.....> 100MΩ @500VDC
 Rise time.....50ms@full load, 300VDC
 Hold up time.....20ms@full load, 300VDC
 Operating temperature.....-20°C~+50°C
 Safety standards.....meet UL1741, EN62109
 Cooling method.....convection
 Weight.....0.57kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF80W-SDW-27	27V 3.0A	2.0%	300mV	84%

150W Photovoltaic Power Supply



New

- Suitable for both AC & DC input
- AC & DC input isolated
- High reliability
- Top brand components for key parts
- Protections: overload/ short circuit
- 5 years limited warranty
- 265 × 113 × 65(mm)

Input voltage range.....170~600VAC or 300~1000VDC
 Input current< 1.5A/ 170VAC
 Power factor> 0.55
 Line regulation (full load).....≤ ± 0.5%
 Output voltage adjust range.....24~25V
 Output overload protection.....> 7.3A delay 50~200ms shut off, re-power on to recover
 Withstand voltage.....I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Set up time.....< 2s@300VAC
 Rise time.....50ms@full load, 300VAC
 Hold up time.....20ms@full load, 300VAC
 Operating temperature.....-20°C~+50°C
 Cooling method.....convection
 Weight.....1.24kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-SDW-24	24V 6.5A	1.0%	200mV	85%

150W AC/DC Photovoltaic Power Supply



New

- Wide input range up to 920VAC
- Protected at 960~1300VAC input
- High reliability
- Top brand components for key parts
- Protections: overload/ short circuit
- 5 years limited warranty
- 265 × 113 × 65(mm)

AC input voltage range.....680~920VAC
 Input frequency.....47~63Hz
 Input current< 0.45A/ 680VAC
 Power factor> 0.5
 Line regulation (full load).....≤ ± 0.5%
 Output voltage adjust range.....24~25V
 Output overload protection.....> 7.3A delay 50~200ms shut off, re-power on to recover
 Withstand voltage.....I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Set up time.....< 2s@800VAC
 Rise time.....50ms@full load, 800VAC
 Hold up time.....20ms@full load, 800VAC
 Operating temperature.....-20°C~+50°C
 Cooling method.....convection
 Weight.....0.97kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-SHW-24	24V 6.5A	1.0%	200mV	85%

150W Single Output Green Power



New

- Protected up to 528VAC
- High reliability
- Standby power consumption < 1W
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F615SL 199 × 98 × 41(mm)



AC input voltage range.....160~280VAC (220~395VDC)
 Input frequency.....47~63Hz
 Inrush current.....cold start, 30A/230VAC
 Input leakage current.....< 1mA/ 230VAC
 Line regulation (full load).....≤ ± 0.5%
 Output voltage adjust range.....± 10%
 Output overload protection.....> 6.7A delay 3s protected, hiccup mode, auto recovery
 Output over voltage protection.....30~36VDC, hiccup mode, auto recovery
 Withstand voltage.....I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time.....50ms@full load (typical)
 Hold up time.....20ms@full load (typical)
 Operating temperature.....-20°C~+50°C
 Safety standards.....GB4943, UL60950, EN60950
 EMC standards.....EN12015, EN12016
 Cooling method.....convection
 Packing.....0.74kg/pcs, 28pcs/CTN

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-SW-24	24V 6.5A	1.0%	150mV	85%



Our products are widely used in the field of industrial control, telecom, LED display & lighting of buildings, elevator, laser equipment, safety control, etc.



We were honoured to offer power supplies for Beijing Olympic Games, 60th National anniversary ceremony and Shanghai Expo2010.



If you have any question of product application or technical problem, our professional engineers are ready to give assistance.



55W~300W for Laser Equipment



Model No.	HF55W-D-L	HF100W-D-L	HF150W-D-L	HF300W-DM-L
Dimension (mm)	160×98×39	199×98×39	199×98×50	199×98×50
Weight & packing	0.45kg, 30pcs	0.60kg, 28pcs	0.68kg, 20pcs	0.73kg, 20pcs
AC input range	170~264VAC (210~370VDC)			
Input frequency	47~63Hz			
Inrush current	cold start, 40A/230VAC			60A/230VAC
Leakage current	< 0.7mA/ 230VAC			< 1mA/230VAC
Line regulation	≤ ± 0.5%			
Vadj range	V ₁ : ± 5% of rated output voltage			
Overload protection	105~150%, auto recovery	105~130%, shut off, re-power on to recover		105~150%, auto recovery
Over voltage protection	--			115~150%, shut off
Withstand voltage	I/P -O/P: 1.5KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min			
Rise time	50ms@full load (typical)			
Hold up time	20ms@full load (typical)			
Operating temp.	-20℃~+50℃			
Safety standards	design meet GB4943, UL60950, EN60950			
Cooling method	convection			fan

Model	DC Output		Voltage Tol.	R&N	Efficiency
HF55W-D-L	15V	0.4~2.0A	± 1%	120mV	78%
	-15V	0.0~2.0A	± 3%	120mV	
HF100W-D-L	15V	0.5~3.0A	± 1%	120mV	78%
	-15V	0.0~3.0A	± 3%	120mV	
HF150W-D-L	15V	0.5~5.0A	± 1%	120mV	85%
	-15V	0.5~5.0A	± 10%	120mV	
HF300W-DM-L	15V	0.5~10.0A	± 1%	120mV	85%
	-15V	0.5~10.0A	± 10%	120mV	

300W Quad. Output for Laser Equipment

- AC input range selected by switch
- Free air cooling convection
- 4 outputs common grounded
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty

AC input voltage range	85~132/ 170~264VAC selected by switch
Inrush current	cold start, 30A/115V, 60A/230V
Input frequency	47~63Hz
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	V _i : $\pm 5\%$ of rated output voltage
Output overload protection	105~150%, hiccup mode, auto recovery
Output protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	design meet GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		Voltage Tol.	R&N	Efficiency
HF300W-QV-A	24V	0.0~9.0A	± 1%	200mV	81%
	15V	0.2~2.0A	± 3%	150mV	
	-15V	0.2~2.0A	± 10%	150mV	
	5V	0.0~2.0A	± 3%	150mV	

240W~350W for Textile Machine



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- 5 years limited warranty

Model No.	HF240W-SE-27	HF350W-SE-48
Dimension (mm)	200×110×50	215×115×50
Weight & packing	0.83kg, 20pcs/CTN	0.89kg, 16pcs/CTN
AC input range	170~264VAC (210~370VDC)	
Input frequency	47~63Hz	
Inrush current	cold start, 40A/230VAC	cold start, 60A/230VAC
Leakage current	< 0.7mA/ 230VAC	
Line regulation	≤ ± 0.5%	
Vadj range	± 10%	
Overload protection	105~130%, shut off, re-power on to recover	
Over voltage protection	--	115~150% shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)	
Hold up time	20ms@full load (typical)	
Operating temp.	-20℃~+50℃	
Safety standards	design meet GB4943, UL60950, EN60950	
Cooling method	convection	fan

Model	DC Output		Load regul.	R&N	Efficiency
HF240W-S-27	27V	10.0A	0.5%	150mV	87%
HF350W-SE-48	48V	7.3A	0.5%	240mV	86%

500W Quad. Output for Laser Equipment



- AC input range selected by switch
- Forced air cooling by built-in fan
- 4 outputs common grounded
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F650F 240 × 124 × 60(mm)

AC input voltage range	85~132/ 170~264VAC (HF500W-QV-A)
AC input voltage range	85~264VAC (HF500W-QL-A)
Inrush current	cold start, 30A/115V, 60A/230V
Input frequency	47~63Hz
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V _i : ± 5% of rated output voltage
Output overload protection	105~150%, hiccup mode, auto recovery
Output protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards	design meet GB4943, UL60950, EN60950
Cooling method	fan
Weight	1.22kg/pcs

Model	DC Output		Voltage Tol.	R&N	Efficiency
HF500W-QV-A	24V	0.0~15.0A	± 1%	200mV	81%
	15V	0.2~5.0A	± 3%	150mV	
	-15V	0.2~5.0A	± 10%	150mV	
	5V	0.0~5.0A	± 3%	150mV	
HF500W-QL-A	24V	0.0~15.0A	± 1%	200mV	81%
	15V	0.2~5.0A	± 3%	150mV	
	-15V	0.2~5.0A	± 10%	150mV	
	5V	0.0~5.0A	± 3%	150mV	

10W~60W Single Output Standard with approval

Features:

- Traditional series, high reliability
- Universal AC input / full range
- Top international brand components for key parts
- Built-in EMI filter
- UL, CE approved (refer to spec. of each series)
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty



Send inquiry now!

Product picture					
	F601	F602	F6025SL	F603	F605
Model No.	HF10W-SL	HF20W-SL	HF25W-SL	HF40W-SL	HF60W-SL
Dimension (mm)	100×58×31	111×78×36	98.5×82×35	129×98×40	160×98×39
Weight & packing	0.15kg, 108pcs/CTN	0.26kg, 60pcs/CTN	0.24kg, 60pcs/CTN	0.37kg, 42pcs/CTN	0.46kg, 30pcs/CTN
AC input voltage range	85~264VAC (120~370VDC)				
Input frequency	47~63Hz				
Inrush current	cold start, 15A/115VAC, 30A/230VAC		cold start, 20A/115VAC, 40A/230VAC		
Input leakage current	< 0.7mA/ 230VAC		< 1mA/ 230VAC		
Line regulation (full load)	≤ ± 0.5%				
Voltage adjust range	± 10%				
Overload protection	built-in IC protection, hiccup mode, auto recovery		105~150%, hiccup mode, auto recovery		
Over voltage protection	clamping by zener diode		115~150%, shut off, re-power on to recover	115~150%, hiccup mode, auto recovery	
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min				
Rise time	50ms@full load (typical)				
Hold up time	20ms@full load (typical)				
Operating temperature	-20℃~+70℃ (refer to the derating curve)				
Safety standards	GB4943, UL60950, EN60950				
EMC standards	GB9254, EN55022 class B, EN55024, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11				
Cooling method	convection				

10W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF10W-SL-5	5V	2.0A	0.5%	80mV	71%
HF10W-SL-12	12V	0.85A	0.5%	120mV	76%
HF10W-SL-15	15V	0.7A	0.5%	120mV	76%
HF10W-SL-24	24V	0.4A	0.5%	150mV	77%
HF10W-SL-48	48V	0.2A	0.5%	150mV	79%

* 3~48VDC output all available.

40W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF40W-SL-5	5V	8.0A	0.5%	80mV	75%
HF40W-SL-12	12V	3.5A	0.5%	120mV	80%
HF40W-SL-15	15V	2.8A	0.5%	120mV	81%
HF40W-SL-24	24V	1.8A	0.5%	150mV	82%
HF40W-SL-48	48V	0.9A	0.5%	150mV	83%

* 3~48VDC output all available.

20W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF20W-SL-5	5V	4.0A	0.5%	80mV	77%
HF20W-SL-12	12V	1.7A	0.5%	120mV	81%
HF20W-SL-15	15V	1.4A	0.5%	120mV	82%
HF20W-SL-24	24V	0.8A	0.5%	150mV	82%
HF20W-SL-48	48V	0.4A	0.5%	150mV	83%

* 3~48VDC output all available.

60W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF60W-SL-5	5V	12.0A	0.5%	80mV	78%
HF60W-SL-12	12V	5.0A	0.5%	120mV	82%
HF60W-SL-15	15V	4.0A	0.5%	120mV	82%
HF60W-SL-24	24V	2.5A	0.5%	150mV	81%
HF60W-SL-48	48V	1.3A	0.5%	150mV	82%

* 3~48VDC output all available.

25W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF25W-SL-3.3	3.3V	6.0A	0.5%	80mV	66%
HF25W-SL-5	5V	5.0A	0.5%	80mV	76%
HF25W-SL-12	12V	2.1A	0.5%	120mV	79%
HF25W-SL-15	15V	1.7A	0.5%	120mV	81%
HF25W-SL-24	24V	1.1A	0.5%	150mV	79%
HF25W-SL-48	48V	0.57A	0.5%	150mV	83%

* 3~48VDC output all available.

The products are designed according to international safety and EMC standards.



High reliability - Only international brand components are adopted for our key parts to ensure long lifetime and high reliability.



70W~350W Single Output Standard with approval

Features:

- Traditional series, high reliability
- AC input / full range
- Top international brand components for key parts
- Built-in EMI filter
- UL, CE approved (refer to spec. of each series)
- Protections: overload/ over voltage/ short circuit/ over temperature (HF350W-SF)
- 5 years limited warranty

Product picture					
	F605	F610	F615UL	F615UL	F630C
Model No.	HF70W-SL	HF100W-SF	HF150W-SF	HF240W-SF	HF350W-SF
Dimension (mm)	160×98×39	199×98×39	199×110×50	199×110×50	215×115×50
Weight & packing	0.48kg, 30pcs/CTN	0.65kg, 28pcs/CTN	0.71kg, 20pcs/CTN	0.91kg, 20pcs/CTN	0.98kg, 16pcs/CTN
AC input voltage range	85~264VAC (120~370VDC)	85~132/ 170~264VAC selected by switch	88~132/ 176~264VAC selected by switch	85~132/ 170~264VAC selected by switch	
Input frequency	47~63Hz				
Inrush current	cold start, 20A/115VAC, 40A/230VAC				cold start, 30A/115VAC, 60A/230VAC
Input leakage current	< 1mA/ 230VAC				
Line regulation (full load)	≤ ± 0.5%				
Voltage adjust range	± 10%				
Overload protection	105~150%, hiccup mode, auto recovery	105~130%, shut off, re-power on to recover			
Over voltage protection	115~150%, hiccup mode, auto recovery	115~150%, shut off, re-power on to recover			
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min				
Rise time	50ms@full load (typical)				
Hold up time	20ms@full load (typical)				
Operating temperature	-20°C~+70°C (refer to the derating curve)				
Safety standards	GB4943, UL60950, EN60950				
EMC standards	GB9254, EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11		GB9254, EN55022 classA, EN61000-4-2,3,4,5,6,8,11		
Cooling method	convection				fan

70W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF70W-SL-5	5V	12.0A	0.5%	80mV	75%
HF70W-SL-12	12V	5.8A	0.5%	120mV	80%
HF70W-SL-15	15V	4.7A	0.5%	120mV	81%
HF70W-SL-24	24V	2.9A	0.5%	150mV	82%
HF70W-SL-36	36V	2.0A	0.5%	150mV	82%
HF70W-SL-48	48V	1.5A	0.5%	150mV	83%

* 3~48VDC output all available.

240W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF240W-SF-5	5V	40.0A	0.5%	100mV	79%
HF240W-SF-12	12V	18.0A	0.5%	120mV	83%
HF240W-SF-15	15V	15.0A	0.5%	120mV	85%
HF240W-SF-24	24V	10.0A	0.5%	150mV	85%
HF240W-SF-30	30V	8.0A	0.5%	150mV	86%
HF240W-SF-48	48V	5.0A	0.5%	150mV	87%

* 3~48VDC output all available.

100W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SF-5	5V	20.0A	0.5%	100mV	79%
HF100W-SF-7.5	7.5V	13.5A	0.5%	100mV	79%
HF100W-SF-12	12V	8.5A	0.5%	120mV	81%
HF100W-SF-13.8	13.8V	7.5A	0.5%	120mV	83%
HF100W-SF-15	15V	6.7A	0.5%	120mV	83%
HF100W-SF-24	24V	4.5A	0.5%	150mV	84%
HF100W-SF-48	48V	2.2A	0.5%	150mV	86%

* 3~48VDC output all available.

350W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF350W-SF-5	5V	60.0A	0.5%	120mV	77%
HF350W-SF-12	12V	29.0A	0.5%	150mV	82%
HF350W-SF-15	15V	23.2A	0.5%	150mV	83%
HF350W-SF-24	24V	14.6A	0.5%	150mV	85%
HF350W-SF-27	27V	13.0A	0.5%	200mV	84%
HF350W-SF-48	48V	7.3A	0.5%	240mV	87%

* 3~48VDC output all available.

150W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SF-5	5V	30.0A	0.5%	100mV	80%
HF150W-SF-7.5	7.5V	20.0A	0.5%	100mV	80%
HF150W-SF-9	9V	16.7A	0.5%	100mV	81%
HF150W-SF-12	12V	12.5A	0.5%	120mV	83%
HF150W-SF-24	24V	6.5A	0.5%	150mV	84%
HF150W-SF-27	27V	5.6A	0.5%	150mV	84%
HF150W-SF-36	36V	4.2A	0.5%	150mV	85%

* 3~48VDC output all available.



TUV Certificate / 证书



CB Certificate / 证书




CCC Certificate / 证书

75W~480W Single Output PFC Series

Features:

- Universal
- PF>0.98@115VAC; >0.94@230VAC
- Built-in active PFC
- UL,TUV,CB,CE,CCC approved (refer to spec. of each series)
- Protections: overload/ over voltage/ short circuit/ over temperature (HF200W-SC, HF320W-SC, HF480W-SC)
- Built in fan speed control (HF200W-SC, HF320W-SC, HF480W-SC)
- No load power consumption<0.5W (HF75W-SC)
- Built in remote sense (option) (HF480W-SC)
- Remote ON/OFF control (option) (HF480W-SC)
- 5 years limited warranty

Product picture						
Model No.	HF75W-SC	HF100W-SC	HF150W-SC	HF200W-SC	HF320W-SC	HF480W-SC
Dimension (mm)	129×98×38	179×99×45	199×99×50	199×99×50	215×115×50	278×127×43
Weight & packing (/CTN)	0.43kg/pcs, 42pcs	0.60kg/pcs, 20pcs	0.72kg/pcs, 20pcs	0.81kg/pcs, 20pcs	1.06kg/pcs, 16pcs	1.62kg/pcs, 10pcs
AC input voltage range	85~264VAC (120~370VDC)					
Input frequency	47~63Hz					
Inrush current	cold start, 35A/115VAC 65A/230VAC	cold start, 20A/115VAC, 40A/230VAC			cold start, 30A/115VAC, 60A/230VAC	
Input leakage current	< 1mA/ 230VAC					
Line regulation (full load)	≤ ± 0.5%					
Voltage adjust range	± 10%					
Overload protection	105~135%, current limiting, auto recovery	105~150%, current limiting, auto recovery			105~150%, hiccup mode, auto recovery	105~130%, current limiting, auto recovery
Over voltage protection	115~150%, shut off, re-power on to recover	115~150%, hiccup mode, auto recovery	115~150%, shut off, re-power on to recover			
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min					
Rise time	50ms@full load (typical)					
Hold up time	20ms@full load (typical)					
Operating temperature	-20℃~+70℃ (refer to the derating curve)					
Safety standards	GB4943, UL60950, EN60950					
EMC standards	GB9254, EN55022 classB, EN55024, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11					
Cooling method	convection			fan		

75W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF75W-SC-5	5V	15.0A	2.0%	80mV	82.5%
HF75W-SC-12	12V	6.3A	1.0%	120mV	87.0%
HF75W-SC-24	24V	3.2A	0.5%	150mV	88.5%
HF75W-SC-48	48V	1.6A	0.5%	150mV	89.0%

* 3~48VDC output all available.

100W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SC-3.3	3.3V	20.0A	0.5%	100mV	70%
HF100W-SC-5	5V	20.0A	0.5%	100mV	77%
HF100W-SC-7.5	7.5V	13.5A	0.5%	100mV	79%
HF100W-SC-12	12V	8.5A	0.5%	120mV	82%
HF100W-SC-15	15V	6.7A	0.5%	120mV	83%
HF100W-SC-24	24V	4.2A	0.5%	150mV	84%
HF100W-SC-48	48V	2.1A	0.5%	150mV	84%

* 3~48VDC output all available.

150W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SC-3.3	3.3V	30.0A	0.5%	100mV	73%
HF150W-SC-5	5V	30.0A	0.5%	100mV	79%
HF150W-SC-7.5	7.5V	20.0A	0.5%	100mV	81%
HF150W-SC-12	12V	12.5A	0.5%	120mV	84%
HF150W-SC-13.5	13.5V	11.2A	0.5%	120mV	85%
HF150W-SC-15	15V	10.0A	0.5%	120mV	85%
HF150W-SC-24	24V	6.3A	0.5%	150mV	86%
HF150W-SC-48	48V	3.2A	0.5%	150mV	86%

* 3~48VDC output all available.

200W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF200W-SC-3.3	3.3V	40.0A	0.5%	100mV	70%
HF200W-SC-5	5V	40.0A	0.5%	100mV	76%
HF200W-SC-7.5	7.5V	26.7A	0.5%	100mV	80%
HF200W-SC-12	12V	16.7A	0.5%	120mV	81%
HF200W-SC-13.5	13.5V	15.0A	0.5%	120mV	82%
HF200W-SC-15	15V	13.5A	0.5%	120mV	83%
HF200W-SC-24	24V	8.4A	0.5%	150mV	84%
HF200W-SC-48	48V	4.2A	0.5%	150mV	85%

* 3~48VDC output all available.

320W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF320W-SC-5	5V	60.0A	0.5%	120mV	78%
HF320W-SC-7.5	7.5V	40.0A	0.5%	120mV	78%
HF320W-SC-12	12V	25.0A	0.5%	150mV	83%
HF320W-SC-13.5	13.5V	22.0A	0.5%	150mV	83%
HF320W-SC-15	15V	20.0A	0.5%	150mV	84%
HF320W-SC-24	24V	13.0A	0.5%	150mV	86%
HF320W-SC-27	27V	11.7A	0.5%	200mV	87%
HF320W-SC-48	48V	6.7A	0.5%	240mV	88%

* 3~48VDC output all available.

480W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF480W-SC-12	12V	43A	0.5%	150mV	85%
HF480W-SC-15	15V	35A	0.5%	150mV	85%
HF480W-SC-24	24V	22A	0.5%	150mV	87%
HF480W-SC-48	48V	11A	0.5%	240mV	89%

* 12~48VDC output all available.

150W 1U Single Output with PFC



New

- Universal AC input / full range
- Built-in active PFC, PF>0.93@230VAC
- Cooling by free air convection
- 1U low profile 30mm
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- 199 × 99 × 30(mm)

CE

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 45A/230VAC
Input leakage current	< 2mA/ 240VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~135%, constant current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+70°C (refer to the derating curve)
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024
Cooling method	convection
Weight	0.6kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-LSC-5	5V 30.0A	0.5%	100mV	87%
HF150W-LSC-12	12V 12.5A	0.5%	120mV	88%
HF150W-LSC-15	15V 10.0A	0.5%	120mV	88%
HF150W-LSC-24	24V 6.3A	0.5%	150mV	89%
HF150W-LSC-48	48V 3.2A	0.5%	200mV	90%

320W 1U Single Output with PFC



New

- Universal AC input / full range
- Built-in active PFC, PF>0.95@230VAC
- Air cooling by built-in fan
- 1U low profile 30mm
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- 215 × 115 × 30(mm)

CE

AC input voltage range	88~264VAC (124~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115VAC, 40A/230VAC
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~135%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+70°C (refer to the derating curve)
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024
Cooling method	fan
Weight	0.9kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF320W-LSC-5	5V 60.0A	0.5%	150mV	83%
HF320W-LSC-12	12V 26.7A	0.5%	150mV	88%
HF320W-LSC-15	15V 21.4A	0.5%	150mV	88%
HF320W-LSC-24	24V 13.4A	0.5%	150mV	89%
HF320W-LSC-48	48V 6.7A	0.5%	200mV	90%

200W 1U Single Output with PFC



New

- Universal AC input / full range
- Built-in active PFC, PF>0.95@230VAC
- Cooling by free air convection
- 1U low profile 30mm
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- 215 × 115 × 30(mm)

CE

AC input voltage range	88~264VAC (124~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115VAC, 40A/230VAC
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~135%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+70°C (refer to the derating curve)
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024
Cooling method	convection
Weight	0.72kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF200W-LSC-5	5V 40.0A	0.5%	150mV	85%
HF200W-LSC-12	12V 16.7A	0.5%	150mV	89%
HF200W-LSC-15	15V 13.4A	0.5%	150mV	89%
HF200W-LSC-24	24V 8.4A	0.5%	150mV	89%
HF200W-LSC-48	48V 4.2A	0.5%	200mV	90%

500W 1U Single Output with PFC



New

- Universal AC input / full range
- Built-in active PFC, PF>0.95@230VAC
- Air cooling by built-in fan
- 1U low profile 40.5mm
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- 230 × 127 × 40.5(mm)

CE


AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 30A/115VAC, 60A/230VAC
Input leakage current	< 2mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~130%, constant current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+70°C (refer to the derating curve)
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024
Cooling method	fan
Weight	1.3kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF500W-LSC-12	12V 41.7A	0.5%	150mV	88%
HF500W-LSC-15	15V 33.4A	0.5%	150mV	88%
HF500W-LSC-24	24V 21.0A	0.5%	150mV	89%
HF500W-LSC-48	48V 10.5A	0.5%	200mV	90%

10W~150W Single Output Standard Series

Features:

- Traditional series, high reliability
- Built-in EMI filter
- Free air cooling convection
- Top international brand components for key parts
- Protections: overload/ short circuit
- 5 years limited warranty

Product picture							
Model No.	HF10W-S	HF20W-S	HF35W-S	HF55W-S	HF70W-S	HF100W-S	HF150W-S
Dimension (mm)	100×58×31	111×78×36	129×98×40	160×98×39	160×98×39	199×98×39	199×98×50
Weight & packing (/CTN)	0.13kg/pcs, 108pcs	0.25kg/pcs, 60pcs	0.34kg/pcs, 42pcs	0.43kg/pcs, 30pcs	0.44kg/pcs, 30pcs	0.58kg/pcs, 28pcs	0.66kg/pcs, 20pcs
AC input voltage range	170~264VAC (210~370VDC)						
Input frequency	47~63Hz						
Inrush current	cold start, 30A/230VAC		cold start, 40A/230VAC				
Input leakage current	< 0.7mA/ 230VAC						
Line regulation (full load)	≤ ± 0.5%						
Voltage adjust range	± 10%						
Overload protection	105~150, hiccup mode, auto recover	105~150%			105~150%, hiccup mode, auto recovery		105~130%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min						
Rise time	50ms@full load (typical)						
Hold up time	20ms@full load (typical)						
Operating temperature	-20°C~+70°C (refer to the derating curve)						
Safety standards	design meet GB4943, UL60950, EN60950						
Cooling method	convection						

10W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF10W-S-5	5V	2.0A	0.5%	80mV	71%
HF10W-S-12	12V	1.0A	0.5%	120mV	76%
HF10W-S-15	15V	0.8A	0.5%	120mV	78%
HF10W-S-24	24V	0.5A	0.5%	150mV	79%
HF10W-S-48	48V	0.2A	0.5%	150mV	80%

* 3~48VDC output all available.

20W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF20W-S-5	5V	4.0A	0.5%	80mV	70%
HF20W-S-12	12V	2.0A	0.5%	120mV	76%
HF20W-S-15	15V	1.5A	0.5%	120mV	77%
HF20W-S-24	24V	1.0A	0.5%	150mV	78%
HF20W-S-48	48V	0.5A	0.5%	150mV	79%

* 3~48VDC output all available.

35W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF35W-S-5	5V	7.0A	0.5%	80mV	73%
HF35W-S-12	12V	3.0A	0.5%	120mV	76%
HF35W-S-15	15V	2.4A	0.5%	120mV	79%
HF35W-S-18	18V	2.0A	0.5%	150mV	79%
HF35W-S-24	24V	1.5A	0.5%	150mV	79%
HF35W-S-48	48V	0.7A	0.5%	150mV	80%

* 3~48VDC output all available.

55W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF55W-S-5	5V	11.0A	0.5%	80mV	74%
HF55W-S-12	12V	4.6A	0.5%	120mV	78%
HF55W-S-15	15V	3.7A	0.5%	120mV	79%
HF55W-S-18	18V	3.0A	0.5%	150mV	80%
HF55W-S-24	24V	2.3A	0.5%	150mV	81%
HF55W-S-48	48V	1.2A	0.5%	150mV	82%

* 3~48VDC output all available.

70W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF70W-S-12	12V	6.0A	0.5%	120mV	80%
HF70W-S-15	15V	4.7A	0.5%	120mV	81%
HF70W-S-18	18V	4.0A	0.5%	150mV	81%
HF70W-S-24	24V	3.0A	0.5%	150mV	82%
HF70W-S-27	27V	2.6A	0.5%	150mV	84%
HF70W-S-48	48V	1.5A	0.5%	150mV	85%

* 12~48VDC output all available.

100W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF100W-S-5	5V	20.0A	0.5%	100mV	78%
HF100W-S-12	12V	9.0A	0.5%	120mV	82%
HF100W-S-13.8	13.8V	8.0A	0.5%	120mV	81%
HF100W-S-15	15V	7.0A	0.5%	120mV	83%
HF100W-S-18	18V	7.0A	0.5%	150mV	84%
HF100W-S-24	24V	5.0A	0.5%	150mV	85%
HF100W-S-36	36V	3.0A	0.5%	150mV	86%
HF100W-S-48	48V	2.1A	0.5%	150mV	86%

* 3~48VDC output all available.

150W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF150W-S-5	5V	30.0A	0.5%	100mV	79%
HF150W-S-12	12V	12.5A	0.5%	120mV	82%
HF150W-S-15	15V	10.0A	0.5%	150mV	83%
HF150W-S-24	24V	6.3A	0.5%	150mV	84%
HF150W-S-28	28V	6.0A	0.5%	150mV	85%
HF150W-S-36	36V	4.2A	0.5%	150mV	85%
HF150W-S-48	48V	3.1A	0.5%	150mV	85%

* 3~48VDC output all available.

Our sales team - 15 branch offices and worldwide distributors are ready to offer you professional technical support and prompt service.



240W~1500W Single Output Standard Series

Features:

- Traditional series, high reliability
- Top international brand components for key parts
- Built-in EMI filter

- Built in fan speed control (HF300W-S, HF350W-S, HF400W-S)
- Forced air cooling by built in fan (HF500W-S ~ HF1500W-S)
- Protections: overload/ short circuit/ over voltage/ over temperature (HF300W-S ~ HF1500W-S)
- 5 years limited warranty

Product picture					
	F620	F630	F630C	F630	F650
Model No.	HF240W-S	HF300W-S	HF350W-S	HF400W-S	HF500W-S ~ HF1500W-S
Dimension (mm)	200×110×50	241×124×65	215×115×50	241×124×65	250×160×87
Weight & packing	0.83kg/pcs, 20pcs/CTN	1.20kg/pcs, 16pcs/CTN	0.98kg/pcs, 16pcs/CTN	1.20kg/pcs, 16pcs/CTN	2.8~3.0kg/pcs, 6pcs/CTN
AC input voltage range	170~264VAC (210~370VDC)				
Input frequency	47~63Hz				
Inrush current	cold start, 40A/230VAC		cold start, 60A/230VAC		
Input leakage current	< 0.7mA/ 230VAC				< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%				
Voltage adjust range	± 10%				
Overload protection	105~130%, shut off, re-power on to recover	105~130%, current limiting, auto recovery	105~130%, shut off, re-power on to recover	105~130%, current limiting, auto recovery	
Over voltage protection	--		115~150%, shut off, re-power on to recover		
Withstand voltage	I/P -O/P: 1.5KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min				
Rise time	50ms@full load (typical)				
Hold up time	20ms@full load (typical)				
Operating temperature	-20℃~+70℃ (refer to the derating curve)				
Safety standards	design meet GB4943, UL60950, EN60950				
Cooling method	convection		fan		

240W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF240W-S-5	5V	40.0A	0.5%	100mV	80%
HF240W-S-9	9V	22.0A	0.5%	100mV	82%
HF240W-S-12	12V	20.0A	0.5%	120mV	84%
HF240W-S-15	15V	15.0A	0.5%	150mV	85%
HF240W-S-24	24V	10.0A	0.5%	150mV	85%
HF240W-S-27	27V	8.0A	0.5%	150mV	87%
HF240W-S-36	36V	7.0A	0.5%	150mV	88%
HF240W-S-48	48V	5.0A	0.5%	150mV	87%

* 3~48VDC output all available.

300W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF300W-S-5	5V	60.0A	0.5%	120mV	78%
HF300W-S-12	12V	25.0A	0.5%	150mV	84%
HF300W-S-15	15V	20.0A	0.5%	150mV	84%
HF300W-S-24	24V	12.5A	0.5%	150mV	87%
HF300W-S-28	28V	11.0A	0.5%	200mV	87%
HF300W-S-48	48V	6.3A	0.5%	240mV	88%

* 3~48VDC output all available.

350W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF350W-S-5	5V	60.0A	0.5%	120mV	77%
HF350W-S-7.5	7.5V	40.0A	0.5%	120mV	80%
HF350W-S-12	12V	29.0A	0.5%	150mV	82%
HF350W-S-13.5	13.5V	25.8A	0.5%	150mV	83%
HF350W-S-15	15V	23.2A	0.5%	150mV	84%
HF350W-S-24	24V	14.6A	0.5%	150mV	84%
HF350W-S-27	27V	13.0A	0.5%	200mV	86%
HF350W-S-48	48V	7.3A	0.5%	240mV	86%

* 3~48VDC output all available.

400W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF400W-S-12	12V	33.0A	0.5%	150mV	83%
HF400W-S-24	24V	17.0A	0.5%	150mV	86%
HF400W-S-32	32V	14.0A	0.5%	200mV	86%
HF400W-S-36	36V	13.0A	0.5%	200mV	86%
HF400W-S-48	48V	8.3A	0.5%	240mV	85%

* 12~48VDC output all available.

500W~1000W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF500W-S-12	12V	42.0A	0.5%	150mV	83%
HF500W-S-24	24V	21.0A	0.5%	150mV	84%
HF500W-S-48	48V	10.0A	0.5%	240mV	88%
HF600W-S-24	24V	25.0A	0.5%	150mV	86%
HF600W-S-32	32V	20.0A	0.5%	200mV	87%
HF600W-S-48	48V	13.0A	0.5%	240mV	88%
HF700W-S-48	48V	15.0A	0.5%	240mV	88%
HF800W-S-24	24V	33.0A	0.5%	150mV	84%
HF800W-S-28	28V	30.0A	0.5%	200mV	88%
HF800W-S-30	30V	27.0A	0.5%	200mV	88%
HF800W-S-48	48V	17.0A	0.5%	240mV	88%
HF900W-S-30	30V	30.0A	0.5%	200mV	86%
HF1000W-S-24	24V	42.0A	0.5%	150mV	84%
HF1000W-S-27	27V	40.0A	0.5%	200mV	87%
HF1000W-S-28	28V	35.0A	0.5%	200mV	87%
HF1000W-S-48	48V	21.0A	0.5%	240mV	88%

1500W Single Output


Model	DC Output		Load regul.	R&N	Efficiency
HF1500W-S-24	24V	62.0A	0.5%	200mV	84%
HF1500W-S-36	36V	42.0A	0.5%	200mV	87%
HF1500W-S-48	48V	31.0A	0.5%	240mV	88%



15W~150W Single Output SM Series

Features:

- AC input / full range
- Miniature size, high power density
- Top international brand components for key parts
- UL, CE approved (refer to spec. of each series)
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty

Product picture							
Model No.	F6015MW	F6025MW	F6025SL	F6055SEL	F603	F605	F610
Model No.	HF15W-SSM	HF25W-SSM	HF35W-SSM	HF50W-SSM	HF75W-SSM	HF100W-SMF	HF150W-SMF
Dimension (mm)	62.5×51×28	78×51×28	98.5×82×35	99×97×38	129×98×40	160×98×39	199×98×39
Weight & packing (/CTN)	0.13kg, 108pcs	0.18kg, 90pcs	0.25kg, 60pcs	0.28kg, 42pcs	0.42kg, 42pcs	0.43kg, 30pcs	0.66kg, 28pcs
AC input voltage range	88~264VAC (124~370VDC)					85~132/170~264VAC selected by switch	
Input frequency	47~63Hz						
Inrush current	cold start, 15A/115V, 30A/230V		cold start, 20A/115V, 40A/230V				
Input leakage current	< 0.7mA/ 230VAC		< 1mA/ 230VAC				
Line regulation (full load)	≤ ± 0.5%						
Voltage adjust range	± 10%						
Overload protection	105~150%, hiccup mode, auto recovery						105~130%, shut off, re-power on to recover
Over voltage protection	clamping by zener diode		115~150%, shut off, re-power on to recover				
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min						
Rise time	50ms@full load (typical)						
Hold up time	20ms@full load (typical)						
Operating temperature	-20℃~+70℃ (refer to the derating curve)						
Safety standards	GB4943, UL60950, EN60950						
EMC standards	GB9254, EN55022 class B, EN55024, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11						
Cooling method	convection						

15W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF15W-SSM-5	5V	3.0A	0.5%	80mV	76%
HF15W-SSM-12	12V	1.3A	0.5%	120mV	82%
HF15W-SSM-24	24V	0.625A	0.5%	150mV	83%
HF15W-SSM-48	48V	0.33A	0.5%	150mV	83%

75W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF75W-SSM-5	5V	12.0A	0.5%	80mV	73%
HF75W-SSM-12	12V	6.0A	0.5%	120mV	82%
HF75W-SSM-24	24V	3.2A	0.5%	150mV	84%
HF75W-SSM-48	48V	1.6A	0.5%	150mV	85%

25W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF25W-SSM-5	5V	5.0A	0.5%	80mV	78%
HF25W-SSM-12	12V	2.1A	0.5%	120mV	82%
HF25W-SSM-15	15V	1.7A	0.5%	120mV	82%
HF25W-SSM-24	24V	1.1A	0.5%	150mV	85%
HF25W-SSM-48	48V	0.57A	0.5%	150mV	85%

100W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SMF-5	5V	14.0A	0.5%	100mV	78%
HF100W-SMF-12	12V	8.5A	0.5%	120mV	83%
HF100W-SMF-15	15V	7.0A	0.5%	120mV	83%
HF100W-SMF-24	24V	4.5A	0.5%	150mV	86%
HF100W-SMF-48	48V	2.3A	0.5%	150mV	86%

35W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF35W-SSM-5	5V	7.0A	0.5%	80mV	74%
HF35W-SSM-12	12V	3.0A	0.5%	120mV	81%
HF35W-SSM-15	15V	2.4A	0.5%	120mV	81%
HF35W-SSM-24	24V	1.5A	0.5%	150mV	82%
HF35W-SSM-36	36V	1.0A	0.5%	150mV	85%
HF35W-SSM-48	48V	0.8A	0.5%	150mV	85%

150W Single Output




Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SMF-5	5V	25.0A	0.5%	100mV	80%
HF150W-SMF-12	12V	12.5A	0.5%	120mV	84%
HF150W-SMF-15	15V	10.0A	0.5%	120mV	84%
HF150W-SMF-24	24V	6.5A	0.5%	150mV	85%
HF150W-SMF-48	48V	3.1A	0.5%	150mV	87%

50W Single Output



Model	DC Output		Load regul.	R&N	Efficiency
HF50W-SSM-5	5V	10.0A	0.5%	80mV	80%
HF50W-SSM-12	12V	4.2A	0.5%	120mV	82%
HF50W-SSM-15	15V	3.4A	0.5%	120mV	82%
HF50W-SSM-24	24V	2.2A	0.5%	150mV	85%
HF50W-SSM-36	36V	1.45A	0.5%	150mV	86%
HF50W-SSM-48	48V	1.1A	0.5%	150mV	86%

* Other output voltage also available, please send inquiry.



UL Certificate / 证书



CE Certificate / 证书



ROHS Certificate / 证书

30W~1000W Single Output M Series

Features:

- Compact size design, high reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ over voltage/ short circuit
- over temperature (HF350W/ 500W/ 600W/ 1000W-SM)
- 5 years limited warranty

Product picture					
	F602	F610	F635SME	F630	F650D
Model No.	HF30W-SM	HF150W-SM	HF350W-SM	HF500W-SM, HF600W-SM	HF1000W-SM
Dimension (mm)	111×78×36	199×98×39	199×98×50	241×124×65	253×160×69
Weight & packing	0.25kg, 60pcs/CTN	0.59kg, 28pcs/CTN	0.71kg, 20pcs/CTN	1.32kg, 16pcs/CTN	2.86kg, 6pcs/CTN
AC input voltage range	170~264VAC (210~370VDC)				
Input frequency	47~63Hz				
Inrush current	cold start, 40A/230VAC		cold start, 60A/230VAC		
Input leakage current	< 0.7mA/ 230VAC				< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%				
Voltage adjust range	± 10%				
Overload protection	105~150%, hiccup mode, auto recovery	105~130%, shut off, re-power on to recover		105~130%, current limiting, auto recovery	
Over voltage protection	--	115~150%, shut off, re-power on to recover			
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min		I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min	
Rise time	50ms@full load (typical)				
Hold up time	20ms@full load (typical)				
Operating temperature	-20°C~+50°C				
Safety standards	design meet GB4943, UL60950, EN60950				
Cooling method	convection		fan		

30W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF30W-SM-5	5V	6.0A	0.5%	80mV	76%
HF30W-SM-12	12V	3.0A	0.5%	120mV	83%
HF30W-SM-15	15V	2.4A	0.5%	120mV	83%
HF30W-SM-24	24V	1.5A	0.5%	150mV	84%
HF30W-SM-48	48V	0.7A	0.5%	150mV	86%

* 5~48VDC output all available.

150W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SM-5	5V	25.0A	0.5%	100mV	80%
HF150W-SM-12	12V	12.5A	0.5%	120mV	83%
HF150W-SM-15	15V	10.0A	0.5%	120mV	84%
HF150W-SM-18	18V	8.3A	0.5%	150mV	85%
HF150W-SM-24	24V	6.3A	0.5%	150mV	85%
HF150W-SM-48	48V	3.1A	0.5%	150mV	86%

* 5~48VDC output all available.

350W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF350W-SM-12	12V	29.0A	0.5%	150mV	80%
HF350W-SM-15	15V	23.0A	0.5%	150mV	81%
HF350W-SM-24	24V	14.6A	0.5%	150mV	84%
HF350W-SM-36	36V	9.7A	0.5%	200mV	86%
HF350W-SM-48	48V	7.3A	0.5%	240mV	86%

* 12~48VDC output all available.

500W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF500W-SM-5	5V	80A	1.0%	120mV	80%
HF500W-SM-12	12V	42A	0.5%	150mV	84%
HF500W-SM-24	24V	21A	0.5%	150mV	85%
HF500W-SM-48	48V	10A	0.5%	240mV	86%

* 5~48VDC output all available.

600W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF600W-SM-12	12V	50A	0.5%	150mV	82%
HF600W-SM-24	24V	25A	0.5%	150mV	86%
HF600W-SM-48	48V	13A	0.5%	240mV	85%

* 12~48VDC output all available.

1000W Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF1000W-SM-12	12V	84A	1.0%	150mV	84%
HF1000W-SM-24	24V	42A	0.5%	150mV	86%
HF1000W-SM-28	28V	35A	0.5%	200mV	87%
HF1000W-SM-48	48V	21A	0.5%	240mV	88%

* 12~48VDC output all available.

Hengfu is recognized as the leading manufacturer in China of industrial switching power supplies.



We have various advanced production equipment and test instrument to ensure accuracy and efficiency.



10W Dual Output Standard with approval




- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 15A/115V, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) ≤ ± 0.5%
 Voltage tolerance V₁: ≤ ± 1%, V₂: ≤ ± 3% (with regulator);
 ≤ ± 10% (without)
 Output voltage adjust range V₁: ± 5% of rated output voltage
 Output overload protection built-in IC protection, hiccup mode,
 auto recovery
 Output over voltage protection clamping by zener diode
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF10W-DL-A	5V	0.20~1.8A	80mV	67%
	5V	0.10~1.0A	100mV	
HF10W-DL-B	5V	0.20~1.8A	80mV	72%
	12V	0.10~0.5A	120mV	
HF10W-DL-C	5V	0.20~1.8A	80mV	72%
	15V	0.10~0.5A	120mV	
HF10W-DL-D	5V	0.20~0.8A	80mV	70%
	24V	0.0~0.25A	150mV	

40W Dual Output Standard with approval



- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) ≤ ± 0.5%
 Voltage tolerance V₁: ≤ ± 1%, V₂: ≤ ± 3% (with regulator);
 ≤ ± 10% (without)
 Output voltage adjust range V₁: ± 5% of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF40W-DL-A	5V	1.0~5.0A	80mV	69%
	5V	0.0~2.0A	100mV	
HF40W-DL-B	5V	0.5~3.0A	80mV	74%
	12V	0.0~2.0A	120mV	
HF40W-DL-C	5V	0.4~2.0A	80mV	73%
	24V	0.0~1.0A	150mV	
HF40W-DL-D	12V	0.5~2.5A	120mV	77%
	12V	0.0~1.5A	120mV	

20W Dual Output Standard with approval




- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 15A/115V, 30A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) ≤ ± 0.5%
 Voltage tolerance V₁: ≤ ± 1%, V₂: ≤ ± 3% (with regulator);
 ≤ ± 10% (without)
 Output voltage adjust range V₁: ± 5% of rated output voltage
 Output overload protection built-in IC protection, hiccup mode,
 auto recovery
 Output over voltage protection clamping by zener diode
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF20W-DL-A	5V	0.5~3.0A	80mV	70%
	5V	0.0~1.0A	100mV	
HF20W-DL-B	5V	0.4~2.0A	80mV	73%
	12V	0.0~1.0A	120mV	
HF20W-DL-C	5V	0.2~1.0A	80mV	73%
	15V	0.0~1.0A	120mV	
HF20W-DL-D	5V	0.4~2.0A	80mV	74%
	24V	0.0~0.5A	150mV	

60W Dual Output Standard with approval



- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) ≤ ± 0.5%
 Voltage tolerance V₁: ≤ ± 1%, V₂: ≤ ± 3% (with regulator);
 ≤ ± 10% (without)
 Output voltage adjust range V₁: ± 5% of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF60W-DL-A	5V	1.0~6.0A	80mV	76%
	12V	0.0~2.5A	120mV	
HF60W-DL-B	5V	0.3~6.0A	80mV	79%
	24V	0.4~2.0A	150mV	
HF60W-DL-C	12V	0.4~2.3A	120mV	78%
	12V	0.0~2.3A	120mV	
HF60W-DL-D	15V	0.3~3.0A	120mV	82%
	15V	0.2~2.5A	120mV	

70W Dual Output Standard with approval




- AC input range selected by switch
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

CE

AC input voltage range 85~132/ 170~264VAC selected by switch
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF70W-DF-A	12V	0.5~4.0A	120mV	79%
	12V	0.0~2.0A	120mV	
HF70W-DF-B	12V	0.5~4.5A	120mV	78%
	15V	0.0~1.0A	120mV	
HF70W-DF-C	12V	0.2~5.0A	120mV	79%
	24V	0.0~2.0A	150mV	

100W Dual Output Standard with approval



- AC input range selected by switch
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

CE

AC input voltage range 85~132/ 170~264VAC selected by switch
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%, shut off, re-power on to recover
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF100W-DF-A	5V	2.0~10.0A	100mV	74%
	12V	0.0~4.0A	120mV	
HF100W-DF-B	5V	3.0~15.0A	100mV	80%
	15V	0.0~2.0A	120mV	
HF100W-DF-C	5V	2.0~15.0A	100mV	80%
	24V	0.6~3.0A	150mV	
HF100W-DF-G	24V	0.5~4.0A	150mV	81%
	5V	0.0~2.0A	100mV	

10W Triple Output Standard with approval



- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

CE

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 15A/115V, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection built-in IC protection, hiccup mode, auto recovery
 Output over voltage protection clamping by zener diode
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF10W-TL-A	5V	0.3~1.5A	80mV	70%
	+12V	0.0~0.2A	120mV	
	-12V	0.0~0.1A	120mV	
HF10W-TL-B	5V	0.2~1.3A	80mV	70%
	+15V	0.0~0.2A	120mV	
	-15V	0.0~0.1A	120mV	
HF10W-TL-C	5V	0.2~1.4A	80mV	68%
	+12V	0.0~0.15A	120mV	
	-5V	0.0~0.1A	80mV	

20W Triple Output Standard with approval



- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

CE

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 15A/115V, 30A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection built-in IC protection, hiccup mode, auto recovery
 Output over voltage protection clamping by zener diode
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF20W-TL-A	5V	0.4~2.0A	80mV	69%
	+12V	0.0~0.5A	120mV	
	-12V	0.0~0.35A	120mV	
HF20W-TL-B	5V	0.5~2.5A	80mV	74%
	+15V	0.0~0.25A	120mV	
	-15V	0.0~0.25A	120mV	
HF20W-TL-C	5V	0.5~2.5A	80mV	68%
	+12V	0.0~0.5A	120mV	
	-5V	0.0~0.35A	80mV	

40W Triple Output Standard with approval

CE




- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF40W-TL-A	5V	0.5~4.0A	80mV	77%
	+12V	0.0~1.0A	120mV	
	-12V	0.0~0.7A	120mV	
HF40W-TL-B	5V	0.5~4.0A	80mV	70%
	+15V	0.0~1.0A	120mV	
	-15V	0.0~0.3A	120mV	
HF40W-TL-C	5V	0.5~4.0A	80mV	68%
	+12V	0.0~1.0A	120mV	
	-5V	0.0~0.5A	80mV	

70W Triple Output Standard with approval

CE



- AC input range selected by switch
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 85~132/ 170~264VAC selected by switch
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF70W-TF-A	5V	1.0~6.0A	80mV	70%
	+12V	0.0~2.0A	120mV	
	-12V	0.0~1.33A	120mV	
HF70W-TF-B	5V	1.0~6.5A	80mV	72%
	+15V	0.0~1.5A	120mV	
	-15V	0.0~1.0A	120mV	
HF70W-TF-C	5V	1.5~8.0A	80mV	70%
	+12V	0.0~2.0A	120mV	
	-5V	0.0~0.4A	80mV	

60W Triple Output Standard with approval

CE




- Universal AC input / full range
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF60W-TL-A	5V	1.0~6.0A	80mV	74%
	+12V	0.0~1.5A	120mV	
	-12V	0.0~1.0A	120mV	
HF60W-TL-B	5V	1.0~5.0A	80mV	76%
	+15V	0.0~2.0A	120mV	
	-15V	0.0~0.83A	120mV	
HF60W-TL-C	5V	1.5~8.0A	80mV	75%
	+12V	0.0~1.2A	120mV	
	-5V	0.0~0.37A	80mV	

100W Triple Output Standard with approval

CE



- AC input range selected by switch
- High reliability
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

AC input voltage range 85~132/ 170~264VAC selected by switch
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%, shut off, re-power on to recover
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards GB4943, UL60950, EN60950
 EMC standards GB9254, EN55022 class B, EN55024
 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF100W-TF-A	5V	2.0~12.0A	100mV	74%
	+12V	0.0~2.0A	120mV	
	-12V	0.0~1.0A	120mV	
HF100W-TF-B	5V	2.0~10.0A	100mV	74%
	+15V	0.0~2.0A	120mV	
	-15V	0.0~1.0A	120mV	

10W Dual Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF10W-D-A	5V	0.3~1.5A	80mV	66%
	5V	0.0~0.3A	100mV	
HF10W-D-B	5V	0.3~1.5A	80mV	69%
	12V	0.0~0.3A	120mV	
HF10W-D-C	5V	0.2~1.2A	80mV	68%
	15V	0.0~0.2A	120mV	
HF10W-D-D	5V	0.2~1.2A	80mV	71%
	24V	0.0~0.2A	150mV	

20W Dual Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF20W-D-A	5V	0.5~3.0A	80mV	62%
	5V	0.0~1.0A	100mV	
HF20W-D-B	5V	0.4~3.0A	80mV	70%
	12V	0.0~1.0A	120mV	
HF20W-D-C	5V	0.5~3.0A	80mV	70%
	15V	0.0~0.5A	120mV	
HF20W-D-D	5V	0.4~2.0A	80mV	71%
	24V	0.0~0.5A	150mV	

35W Dual Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%
 Withstand voltage I/P -O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF35W-D-B	5V	0.5~5.0A	80mV	77%
	12V	0.0~2.0A	120mV	
HF35W-D-C	5V	0.5~5.0A	80mV	78%
	24V	0.0~1.0A	150mV	
HF35W-D-M	12V	0.2~2.5A	120mV	75%
	-12V	0.0~1.0A	120mV	
HF35W-D-K	15V	0.2~1.2A	120mV	81%
	-15V	0.0~1.2A	120mV	

55W~70W Dual Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2: \leq \pm 3\%$ (with regulator);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF55W-D-A	5V	0.5~7.0A	80mV	77%
	12V	0.0~2.0A	120mV	
HF55W-D-B	5V	0.5~6.0A	80mV	76%
	24V	0.0~2.0A	150mV	
HF55W-D-L	15V	0.4~2.0A	120mV	78%
	-15V	0.0~2.0A	120mV	
HF55W-D-S	12V	0.4~2.3A	120mV	75%
	-12V	0.0~2.3A	120mV	
HF55W-D-V	24V	0.2~1.2A	150mV	79%
	-24V	0.0~1.2A	150mV	
HF70W-D-F	24V	0.5~2.5A	150mV	85%
	5V	0.0~2.0A	100mV	
HF70W-D-G	24V	0.5~2.5A	150mV	81%
	12V	0.0~2.0A	120mV	
HF70W-D-H	5V	0.5~3.0A	100mV	75%
	24V	0.0~2.0A	150mV	

100W Dual Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

AC input voltage range	170~264VAC (210~370VDC)
Inrush current	cold start, 40A/230V
Input leakage current.....	< 0.7mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Voltage tolerance.....	V ₁ : ≤ ± 1%, V ₂ : ≤ ± 3%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage
Output overload protection	105~130%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~-+50℃
Safety standards.....	design meet GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Efficiency
HF100W-D-A	5V	2.0~10.0A	100mV	75%
	12V	0.0~4.0A	120mV	
HF100W-D-C	5V	2.0~15.0A	100mV	77%
	24V	0.0~3.0A	150mV	
HF100W-D-G	24V	0.0~4.0A	150mV	81%
	5V	0.0~3.0A	100mV	
HF100W-D-L	15V	0.5~3.0A	120mV	78%
	-15V	0.0~3.0A	120mV	

150W Dual Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F615 199 × 98 × 50(mm)

AC input voltage range.....	170~264VAC (210~370VDC)
Inrush current.....	cold start, 40A/230V
Input leakage current.....	< 0.7mA/ 230VAC
Line regulation (full load).....	≤ ± 0.5%
Voltage tolerance.....	V ₁ : ≤ ± 1%, V ₂ : ≤ ± 3% (with regulator); ≤ ± 10% (without)
Output voltage adjust range.....	V ₁ : ± 5% of rated output voltage
Output overload protection.....	105~130%, shut off, re-power on to recover
Withstand voltage.....	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time.....	20ms@full load (typical)
Operating temperature.....	-20°C~+50°C
Safety standards.....	design meet GB4943, UL60950, EN60950
Cooling method.....	convection

Model	DC Output		R&N	Efficiency
HF150W-D-D	24V	0.0~5.0A	150mV	84%
	12V	0.0~3.0A	120mV	
HF150W-D-G	24V	0.0~6.0A	150mV	82%
	5V	0.0~3.0A	100mV	
HF150W-D-L	15V	0.5~5.0A	120mV	85%
	-15V	0.5~5.0A	120mV	
HF150W-D-Q	24V	0.5~4.0A	150mV	88%
	-24V	0.5~4.0A	150mV	

200W Dual Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F620 200 × 110 × 50(mm)

AC input voltage range	170~264VAC (210~370VDC)
Inrush current	cold start, 40A/230V
Input leakage current.....	< 0.7mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Voltage tolerance.....	V ₁ : ≤ ± 1%, V ₂ : ≤ ± 3%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage
Output overload protection	105~130%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards.....	design meet GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Efficiency
HF200W-D-A	24V	1.0~8.0A	150mV	86%
	12V	0.0~3.0A	120mV	
HF200W-D-D	24V	1.0~9.0A	150mV	84%
	5V	0.0~2.0A	100mV	
HF200W-D-E	12V	2.0~12.0A	120mV	83%
	24V	0.0~2.0A	150mV	
HF200W-D-G	24V	1.0~7.0A	150mV	85%
	24V	0.0~1.5A	150mV	

300W~400W Dual Output Standard Series



- High reliability, low cost
- Built-in fan speed control
- Built-in EMI filter
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630 241 × 124 × 65(mm)

AC input voltage range.....	170~264VAC (210~370VDC)
Inrush current	cold start, 60A/230V
Input leakage current.....	< 0.7mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Voltage tolerance.....	V ₁ : ≤ ± 1%, V ₂ : ≤ ± 3%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage
Output overload protection	105~130%, current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards.....	design refer to GB4943, UL60950, EN60950
Cooling method	fan

Model	DC Output		R&N	Efficiency
HF300W-D-A	24V	2.0~11.0A	150mV	84%
	5V	0.0~2.5A	120mV	
HF300W-D-B	24V	2.0~11.0A	150mV	84%
	12V	0.0~3.0A	150mV	
HF400W-D-A	24V	3.0~16.0A	150mV	84%
	12V	0.0~1.0A	150mV	
HF400W-D-C	24V	3.0~15.0A	150mV	83%
	5V	0.0~3.0A	120mV	

10W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF10W-T-A	5V	0.3~1.5A	80mV	68%
	+12V	0.0~0.2A	120mV	
	-12V	0.0~0.1A	120mV	
HF10W-T-B	5V	0.2~1.3A	80mV	69%
	+15V	0.0~0.2A	120mV	
	-15V	0.0~0.1A	120mV	
HF10W-T-C	5V	0.2~1.2A	80mV	63%
	+12V	0.0~0.25A	120mV	
	-5V	0.0~0.2A	80mV	

35W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF35W-T-A	5V	0.5~4.0A	80mV	67%
	+12V	0.0~1.2A	120mV	
	-12V	0.0~1.0A	120mV	
HF35W-T-B	5V	0.5~4.0A	80mV	70%
	+15V	0.0~0.5A	120mV	
	-15V	0.0~0.5A	120mV	
HF35W-T-C	5V	0.5~3.0A	80mV	65%
	+12V	0.0~1.0A	120mV	
	-5V	0.0~1.0A	80mV	

20W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 30A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF20W-T-A	5V	0.3~3.0A	80mV	69%
	+12V	0.0~1.0A	120mV	
	-12V	0.0~0.5A	120mV	
HF20W-T-B	5V	0.4~2.0A	80mV	68%
	+15V	0.0~0.35A	120mV	
	-15V	0.0~0.35A	120mV	
HF20W-T-C	5V	0.4~2.0A	80mV	70%
	+12V	0.0~0.5A	120mV	
	-5V	0.0~1.0A	80mV	

55W Triple Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF55W-T-A	5V	1.0~6.0A	80mV	72%
	+12V	0.0~1.0A	120mV	
	-12V	0.0~1.0A	120mV	
HF55W-T-B	5V	1.0~5.0A	80mV	70%
	+15V	0.0~1.0A	120mV	
	-15V	0.0~1.0A	120mV	
HF55W-T-C	5V	1.0~5.0A	80mV	69%
	+12V	0.0~1.5A	120mV	
	-5V	0.0~2.0A	80mV	

70W Triple Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF70W-T-A	5V	0.8~6.0A	80mV	73%
	12V	0.0~2.0A	120mV	
	-12V	0.0~1.0A	120mV	
HF70W-T-B	5V	1.0~7.0A	80mV	77%
	+15V	0.0~1.5A	120mV	
	-15V	0.0~1.0A	120mV	
HF70W-T-H	5V	1.0~5.0A	80mV	73%
	12V	0.0~1.0A	120mV	
	24V	0.0~1.0A	150mV	

150W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F615 199 × 98 × 50(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF150W-T-A	24V	0.5~4.0A	150mV	78%
	12V	0.0~3.0A	120mV	
	5V	0.0~3.0A	100mV	
HF150W-T-B	24V	1.0~5.0A	150mV	85%
	+12V	0.0~1.0A	120mV	
	-12V	0.0~1.0A	120mV	
HF150W-T-L	5V	1.0~6.0A	100mV	74%
	12V	0.1~4.0A	120mV	
	24V	0.0~2.5A	150mV	

100W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF100W-T-A	5V	2.0~12.0A	100mV	74%
	+12V	0.0~2.0A	120mV	
	-12V	0.0~1.0A	120mV	
HF100W-T-B	5V	2.0~10.0A	100mV	75%
	+15V	0.0~2.0A	120mV	
	-15V	0.0~1.0A	120mV	
HF100W-T-D	5V	1.0~6.0A	100mV	76%
	12V	0.0~2.0A	120mV	
	24V	0.0~2.0A	150mV	

300W Triple Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630 241 × 124 × 65(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 60A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3: \leq \pm 3\%$
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%, current limiting, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design refer to GB4943, UL60950, EN60950
 Cooling method fan

Model	DC Output		R&N	Efficiency
HF300W-T-A	24V	2.0~11.0A	150mV	82%
	12V	0.0~2.0A	150mV	
	12V	0.0~1.0A	150mV	
HF300W-T-B	27V	2.0~10.0A	200mV	83%
	12V	0.0~3.0A	150mV	
	5V	0.0~2.0A	120mV	
HF300W-T-H	24V	2.0~10.0A	150mV	82%
	12V	0.0~3.0A	150mV	
	5V	0.0~2.0A	120mV	

35W Quad. Output Standard Series




- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Input frequency 47~63Hz
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3, V_4: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF35W-Q-A	5V	0.5~3.0A	80mV	65%
	12V	0.0~0.5A	120mV	
	-12V	0.0~0.5A	120mV	
	24V	0.0~0.35A	150mV	
HF35W-Q-B	5V	0.4~2.0A	80mV	65%
	12V	0.0~0.35A	120mV	
	15V	0.0~0.5A	120mV	
	-15V	0.0~0.5A	120mV	

100W Quad. Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Input frequency 47~63Hz
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3, V_4: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time 50ms@full load (typical)
 Hold up time 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF100W-Q-A	5V	1.0~5.0A	100mV	70%
	24V	0.5~2.0A	150mV	
	15V	0.0~1.0A	120mV	
	-15V	0.0~0.5A	120mV	
HF100W-Q-B	5V	1.0~6.0A	100mV	70%
	24V	0.5~2.0A	150mV	
	12V	0.0~1.0A	120mV	
	-12V	0.0~0.5A	120mV	

55W Quad. Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3, V_4: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF55W-Q-A	5V	1.5~7.0A	80mV	74%
	-5V	0.0~0.5A	80mV	
	12V	0.0~1.0A	120mV	
	-12V	0.0~0.5A	120mV	
HF55W-Q-B	5V	0.5~4.0A	80mV	72%
	24V	0.0~1.0A	150mV	
	12V	0.0~0.7A	120mV	
	-12V	0.0~0.7A	120mV	
HF55W-Q-C	5V	0.5~3.0A	80mV	70%
	24V	0.0~1.0A	150mV	
	15V	0.0~0.5A	120mV	
	-15V	0.0~0.5A	120mV	

150W Quad. Output Standard Series



- High reliability, low cost
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F615 199 × 98 × 50(mm)

AC input voltage range 170~264VAC (210~370VDC)
 Inrush current cold start, 40A/230V
 Input leakage current < 0.7mA/ 230VAC
 Line regulation (full load) $\leq \pm 0.5\%$
 Voltage tolerance $V_1: \leq \pm 1\%, V_2, V_3, V_4: \leq \pm 3\%$ (with regulators);
 $\leq \pm 10\%$ (without)
 Output voltage adjust range $V_1: \pm 5\%$ of rated output voltage
 Output overload protection 105~130%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min; I/P-F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 Cooling method convection

Model	DC Output		R&N	Efficiency
HF150W-Q-A	36V	0.5~2.5A	150mV	81%
	-24V	0.1~0.5A	150mV	
	17V	0.2~1.0A	150mV	
	5V	0.0~1.0A	100mV	
HF150W-Q-B	5V	1.5~8.0A	100mV	76%
	24V	0.5~2.0A	150mV	
	12V	0.0~1.5A	120mV	
	-12V	0.0~1.5A	120mV	
HF150W-Q-C	5V	0.4~2.0A	100mV	77%
	24V	0.5~2.0A	150mV	
	15V	0.0~1.5A	120mV	
	-15V	0.0~1.0A	120mV	

15W Battery Charging Power Supply



- To charge lead acid battery
- Auto switch when power off (UPS function)
- Battery low protection
- Battery anti reverse connection protection
- Protections: overload/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

AC input voltage range	170~264VAC (210~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	V ₁ : $\pm 5\%$ of rated output voltage V ₂ : unadjustable
Output overload protection	built-in IC protection, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	design meet GB4943, UL60950, EN60950
Cooling method	convection
Packing	0.14kg/pcs, 108pcs/CTN

Model	DC Output		R&N	Efficiency
HF15W-SB-12	12V	1.0A	120mV	72%
	13.8V	0.3A(Charger)		
HF15W-SB-24	24V	0.4A	150mV	72%
	27.1V	0.2A(Charger)		

20W Battery Charging Power Supply



- To charge lead acid battery
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery anti reverse connection protection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

AC input voltage range.....	85~264VAC (120~370VDC)
Input frequency.....	47~63Hz
Inrush current	cold start, 15A/115V, 30A/230V
Input leakage current.....	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage V ₂ : unadjustable
Output overload protection	built-in IC protection, hiccup mode, auto recovery
Output over voltage protection	115~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards.....	GB4943, UL60950, EN60950
EMC standards.....	GB9254, EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Packing.....	0.27kg/pcs, 60pcs/CTN

Model	DC Output		R&N	Efficiency
HF20W-SB-12	12V	1.5A	120mV	71%
	13.8V	0.5A(Charger)		
HF20W-SB-24	24V	0.7A	150mV	68%
	27.1V	0.2A(Charger)		

40W Battery Charging Power Supply



- To charge lead acid battery
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery anti reverse connection protection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F603 129 x 98 x 40(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage V ₂ : unadjustable
Output overload protection	built-in IC protection, hiccup mode, auto recovery
Output over voltage protection	115~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C ~+50°C
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Packing	0.39ka/pcs. 42pcs/CTN

Model	DC Output		R&N	Efficiency
HF40W-SB-13.8	13.8V	2.9A	120mV	78%
	13.4V	0.23A(Charger)		
HF40W-SB-27.6	27.6V	1.4A	150mV	76%
	26.5V	0.16A(Charger)		

55W Battery Charging Power Supply



- To charge lead acid battery
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery anti reverse connection protection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

AC input voltage range.....	85~264VAC (120~370VDC)
Input frequency.....	47~63Hz
Inrush current.....	cold start, 20A/115V, 40A/230V
Input leakage current.....	< 1mA/ 230VAC
Line regulation (full load).....	$\leq \pm 0.5\%$
Output voltage adjust range.....	V ₁ : $\pm 5\%$ of rated output voltage V ₂ : unadjustable
Output overload protection.....	105~150%, hiccup mode, auto recovery
Output over voltage protection.....	115~150%, hiccup mode, auto recovery
Withstand voltage.....	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time.....	20ms@full load (typical)
Operating temperature.....	-20°C~+50°C
Safety standards.....	GB4943, UL60950, EN60950
EMC standards.....	GB9254, EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method.....	convection
Packing.....	0.46kg/pcs, 30pcs/CTN

Model	DC Output		R&N	Efficiency
HF55W-SB-13.8	13.8V	4.0A	120mV	77%
	13.4V	0.23A(Charger)		
HF55W-SB-27.6	27.6V	2.0A	150mV	78%
	26.5V	0.16A(Charger)		

55W Dual Output for Battery Charging



- High reliability, low cost
- To charge lead acid battery
- Auto switch when power off (UPS function)
- Charging current limited
- Battery low protection
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)


AC input voltage range	170~264VAC (210~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 40A/230V
Input leakage current	< 0.7mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage V ₂ : unadjustable
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	design meet GB4943, UL60950, EN60950
Cooling method	convection
Packing	0.46kg/pcs, 30pcs/CTN

Model	DC Output		R&N	Efficiency
HF55W-D-U	12.8V	4.0A	120mV	77%
	13.8V	0.2A(Charger)		

For more details, we sincerely invite you to visit our website: www.hengfu.com.



155W Battery Charging Power Supply




- To charge lead acid battery
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery anti reverse connection protection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F615 199 × 98 × 50(mm)

AC input voltage range	85~132/ 170~264VAC selected by switch
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage V ₂ : unadjustable
Output overload protection	105~130%, shut off, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Packing	0.74kg/pcs, 20pcs/CTN

Model	DC Output		R&N	Efficiency
HF155W-SB-13.8	13.8V	11.5A	120mV	82%
	13.3V	0.5A(Charger)		
HF155W-SB-27.6	27.6V	5.5A	150mV	85%
	27.1V	0.5A(Charger)		

100W Battery Charging Power Supply



- To charge lead acid battery
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery anti reverse connection protection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F610 199 × 98 × 39(mm)

AC input voltage range	85~132/ 170~264VAC selected by switch
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	V ₁ : ± 5% of rated output voltage V ₂ : unadjustable
Output overload protection	105~130%, shut off, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Packing	0.64kg/pcs, 28pcs/CTN

Model	DC Output		R&N	Efficiency
HF100W-SB-13.8	13.8V	6.0A	120mV	79%
	13.3V	0.5A(Charger)		
HF100W-SB-27.6	27.6V	3.0A	150mV	78%
	27.1V	0.5A(Charger)		

15W Single Output DIN Rail Series



- Universal AC input / full range
- Installed on DIN rail TS35/ 7.5 or 15
- High reliability, compact design
- DC OK signal output
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F6015DRA 35 × 73.5 × 63.4(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	clamping by zener diode
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch, plug-in terminal block 3P/ 5.0mm pitch, clip terminal block
Weight	0.17kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF15W-SDR-12	12V 1.25A	0.5%	120mV	82%
HF15W-SDR-15	15V 1.0A	0.5%	120mV	82%
HF15W-SDR-24	24V 0.63A	0.5%	150mV	82%
HF15W-SDR-48	48V 0.3A	0.5%	150mV	83%

30W Single Output DIN Rail Series



- Universal AC input / full range
- Installed on DIN rail TS35/ 7.5 or 15
- High reliability, compact design
- DC OK signal output
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F603DRA 35 × 89.2 × 75.2(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency.....	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current.....	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards.....	UL508, UL60950, EN60950
EMC standards.....	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch 3P/ 5.0mm pitch, clip terminal block
Weight	0.25kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF30W-SDR-12	12V	2.5A	0.5%	120mV	81%
HF30W-SDR-15	15V	2.0A	0.5%	120mV	82%
HF30W-SDR-24	24V	1.5A	0.5%	150mV	83%
HF30W-SDR-48	48V	0.63A	0.5%	150mV	86%

50W Single Output DIN Rail Series



- Universal AC input / full range
- Installed on DIN rail TS35/ 7.5 or 15
- High reliability, compact design
- DC OK signal output
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F605DR 45 x 89.2 x 75.2(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN55024 EN61000-2-3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch 5P/ 5.0mm pitch, plug-in terminal block
Weight	0.31kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF50W-SDR-12	12V	4.2A	0.5%	120mV	80%
HF50W-SDR-13.8	13.8V	3.6A	0.5%	120mV	80%
HF50W-SDR-24	24V	2.1A	0.5%	150mV	80%
HF50W-SDR-48	48V	1.0A	0.5%	150mV	86%

75W Single Output DIN Rail Series



- Universal AC input / full range
- Installed on DIN rail TS35/ 7.5 or 15
- High reliability, compact design
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F606DR 45 × 101.2 × 90.2(mm)

AC input voltage range.....	85~264VAC (120~370VDC)
Input frequency.....	47~63Hz
Inrush current.....	cold start, 20A/115V, 40A/230V
Input leakage current.....	< 1mA/ 230VAC
Line regulation (full load).....	≤ ± 0.5%
Output voltage adjust range.....	± 10%
Output overload protection.....	105~150%, hiccup mode, auto recovery
Output over voltage protection.....	115~150%, shut off, re-power on to recover
Withstand voltage.....	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time.....	50ms@full load (typical)
Hold up time.....	20ms@full load (typical)
Operating temperature.....	-20°C~+50°C
Safety standards.....	UL508, UL60950, EN60950
EMC standards.....	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method.....	convection
Connection.....	3P/ 7.5mm pitch 4P/ 5.0mm pitch, plug-in terminal block
Weight.....	0.42kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF75W-SDR-12	12V	6.3A	0.5%	120mV	83%
HF75W-SDR-24	24V	3.2A	0.5%	150mV	86%
HF75W-SDR-48	48V	1.6A	0.5%	150mV	87%

120W Single Output DIN Rail Series



- AC input range selected by switch
- High reliability, low cost
- Installed on DIN rail TS35/ 7.5 or 15
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F612DRB 45.4 × 99.5 × 114(mm)

AC input voltage range	85~132/ 170~264VAC selected by switch
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min O/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch 4P/ 5.0mm pitch, plug-in terminal block
Weight	0.54kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF120W-SFDR-12	12V	10.0A	0.5%	120mV	83%
HF120W-SFDR-24	24V	5.0A	0.5%	150mV	86%
HF120W-SFDR-48	48V	2.5A	0.5%	150mV	87%

120W Single Output DIN Rail - with PFC



- Universal AC input / full range
- PF=0.98@115VAC; >0.94@230VAC
- Installed on DIN rail TS35/ 7.5 or 15
- OCP indication
- High reliability, compact design
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F612DR 50 × 107 × 120.2(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~130%, delay shutdown, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch 4P/ 5.0mm pitch, plug-in terminal block
Weight	0.64kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF120W-SDR-12	12V 10.0A	0.5%	120mV	84%
HF120W-SDR-24	24V 5.0A	0.5%	150mV	85%
HF120W-SDR-48	48V 2.5A	0.5%	150mV	87%

150W Single Output DIN Rail - Wide Range



- Wide AC input range up to 528VAC
- Installed on DIN rail TS35/ 7.5 or 15
- High reliability, compact design
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F615DRB 74.4 × 114.2 × 129.2(mm)

AC input voltage range	170~528VAC (single & two phase)
Input frequency	47~63Hz
Inrush current	cold start, 40A/230V
Input current	< 1.6A/ 230VAC
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output current	rated 6A, peak 10A for 3 seconds
Output voltage range	23~28VDC, rated 24VDC
Output overload protection	105~150%, delay shutdown, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 6.35mm pitch 4P/ 6.35mm pitch, screw terminal block
Weight	0.94kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-WDR-24	24V 6.0A	2.0%	200mV	82%

150W Single Output DIN Rail Series



- AC input range selected by jumper
- Installed on DIN rail TS35/ 7.5 or 15
- Approvals: UL508 listed, UL/ CUL/ CE
- High reliability, compact design
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F615DRA 108.4 × 74.2 × 109(mm)

AC input voltage range	85~132/ 170~264VAC selected by jumper
Input frequency	47~63Hz
Inrush current	cold start, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~150%, delay shutdown, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	UL508, UL60950, EN60950 approved
EMC standards	EN55022 class B EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 6.35mm pitch 4P/ 6.35mm pitch, screw terminal block
Weight	0.67kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-SDR-12	12V 12.5A	0.5%	120mV	83%
HF150W-SDR-13.8	13.8V 11.0A	0.5%	120mV	83%
HF150W-SDR-15	15V 10.0A	0.5%	120mV	83%
HF150W-SDR-24	24V 6.3A	0.5%	150mV	84%
HF150W-SDR-48	48V 3.1A	0.5%	150mV	85%

240W Single Output DIN Rail - with PFC



- Universal AC input / full range
- PF>0.98@115VAC; >0.94@230VAC
- Installed on DIN rail TS35/ 7.5 or 15
- High efficiency up to 90%
- ZCS technology to reduce power dissipation
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F624DRA 63.2 × 114.4 × 125.2(mm)

AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output voltage adjust range	± 10%
Output overload protection	105~130%, delay shutdown, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	UL508, UL60950, EN60950
EMC standards	EN55022 class B, EN55024 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11
Cooling method	convection
Connection	3P/ 7.5mm pitch 6P/ 5.0mm pitch, plug-in terminal block
Weight	0.90kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF240W-SDR-24	24V 10.0A	0.5%	150mV	91%
HF240W-SDR-48	48V 5.0A	0.5%	150mV	92%

100W~500W Single Output Rain-proof Series

Features:

- High reliability, low cost
- IP21 design, suitable for outdoor or damp locations
- Built-in EMI filter
- Protections: overload/ short circuit
- 2 years warranty



Product picture					
	F610YS	F620YS	F640YS	F640YS	F640YS
Model No.	HF100W-YS	HF200W-YS	HF350W-YS	HF400W-YS	HF500W-YS
Dimension (mm)	191.5×101.4×61.7	220×117.6×71.5	236.5×138.4×67.5	236.5×138.4×67.5	236.5×138.4×67.5
Weight & packing	0.46kg, 20pcs/CTN	0.78kg, 20pcs/CTN	1.05kg, 16pcs/CTN	1.06kg, 16pcs/CTN	1.06kg, 16pcs/CTN
AC input voltage range	170~264VAC (210~370VDC)				
Input frequency	47~63Hz				
Inrush current	cold start, 40A/230VAC		cold start, 60A/230VAC		
Input leakage current	< 0.7mA/ 230VAC				
Line regulation (full load)	≤ ± 0.5%				
Voltage adjust range	± 10%				
Overload protection	105~150%, hiccup mode, auto recovery		105~130%, shut off, re-power on to recover		
Short circuit protection	hiccup mode, auto recovery		shut off, re-power on to recover		
Withstand voltage	I/P -O/P: 1.5KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min				
Rise time	50ms@full load (typical)				
Hold up time	20ms@full load (typical)				
Operating temperature	-20°C~-+50°C				
Safety standards	design refer to GB4943, UL60950, EN60950				
Cooling method	convection		fan		

100W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF100W-YS-12	12V 9.0A	0.5%	120mV	81%
HF100W-YS-24	24V 4.2A	0.5%	150mV	82%
HF100W-YS-36	36V 3.0A	0.5%	150mV	83%

200W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF200W-YS-12	12V 16.7A	0.5%	120mV	84%
HF200W-YS-24	24V 8.3A	0.5%	150mV	85%
HF200W-YS-36	36V 5.6A	0.5%	150mV	85%

350W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF350W-YS-12	12V 29.0A	0.5%	120mV	82%
HF350W-YS-24	24V 14.6A	0.5%	150mV	84%
HF350W-YS-36	36V 10.0A	0.5%	200mV	85%

400W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF400W-YS-12	12V 33.0A	0.5%	120mV	82%
HF400W-YS-24	24V 17.0A	0.5%	150mV	84%
HF400W-YS-36	36V 13.0A	0.5%	200mV	85%

500W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF500W-YS-12	12V 42.0A	0.5%	120mV	83%
HF500W-YS-24	24V 21.0A	0.5%	150mV	85%
HF500W-YS-36	36V 14.0A	0.5%	200mV	86%






Major supplier



40W~400W 1~2 Output Telecom Series

Features:

- Wide AC input range up to 280VAC
- Wide operating temperature
- Applicable to severe working condition
- Built-in lightningproof 3000A (8/20us)
- AC input failure signal (option)
- Protections: overload/ over voltage/ short circuit/ over temperature (HF300W-ST/DT, HF400W-ST/DT)
- 5 years limited warranty

Product picture						
	F603	F605	F610	F615	F620	F630
Model No.	HF40W-ST	HF70W-ST/DT	HF100W-ST/DT	HF150W-ST/DT	HF200W-ST/DT	HF300~400W-ST/DT
Dimension (mm)	129×98×40	160×98×39	199×98×39	199×98×50	200×110×50	241×124×65
Weight & packing	0.36kg, 42pcs/CTN	0.46kg, 30pcs/CTN	0.60kg, 28pcs/CTN	0.68kg, 20pcs/CTN	0.85kg, 20pcs/CTN	1.22kg, 16pcs/CTN
AC input voltage range	160~280VAC (210~370VDC)					
Input frequency	47~63Hz					
Inrush current	cold start, 40A/230VAC					cold start, 60A/230V
Input leakage current	< 1mA/ 230VAC					
Line regulation (full load)	≤ ± 0.5%					
Voltage tolerance	V ₁ : ≤ ± 1%, V ₂ : ≤ ± 3%					
Voltage adjust range	single output: ± 10%; dual output: V ₁ : ± 5% of rated output voltage					
Overload protection	105~150%, hiccup mode, auto recovery		105~130%, shut off, re-power on to recover			105~130%, current limiting, auto recovery
Over voltage protection	115~150%, hiccup mode, auto recovery		115~150%, shut off, re-power on to recover			
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P -F/G: 1.5KVAC/1min; O/P-F/G: 0.5KVAC/1min					
Rise time	50ms@full load (typical)					
Hold up time	20ms@full load (typical)					
Operating temperature	-30℃~+65℃ (refer to the derating curve)					
Safety standards	design meet GB4943, UL60950, EN60950					
Cooling method	convection					fan

40W Single Output

Model	DC Output	Load regul.	R&N	Efficiency
HF40W-ST-13.8	13.8V 2.9A	0.5%	120mV	80%
HF40W-ST-27	27V 1.5A	0.5%	150mV	83%
HF40W-ST-48	48V 0.9A	0.5%	150mV	84%

70W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF70W-ST-13.8	13.8V 5.0A	0.5%	120mV	82%
HF70W-ST-27	27V 2.6A	0.5%	150mV	83%
HF70W-ST-48	48V 1.5A	0.5%	150mV	84%
HF70W-DT-B	27V 2.2A	0.5%	150mV	81%
	12V 1.0A	0.5%	120mV	

100W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF100W-ST-13.8	13.8V 7.2A	0.5%	120mV	83%
HF100W-ST-27	27V 3.7A	0.5%	150mV	85%
HF100W-ST-28	28V 3.5A	0.5%	150mV	85%
HF100W-ST-48	48V 2.2A	0.5%	150mV	87%
HF100W-DT-B	27V 3.0A	0.5%	150mV	83%
	12V 2.0A	0.5%	120mV	

150W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF150W-ST-13.8	13.8V 10.9A	0.5%	120mV	85%
HF150W-ST-27	27V 5.6A	0.5%	150mV	87%
HF150W-ST-48	48V 3.1A	0.5%	150mV	89%
HF150W-DT-B	27V 4.0A	0.5%	150mV	79%
	12V 4.0A	0.5%	120mV	
HF150W-DT-E	30V 5.0A	0.5%	150mV	84%
	12V 1.5A	0.5%	120mV	

200W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF200W-ST-13.8	13.8V 14.5A	0.5%	120mV	85%
HF200W-ST-27	27V 8.0A	0.5%	150mV	86%
HF200W-ST-28	28V 8.0A	0.5%	150mV	86%
HF200W-ST-48	48V 4.2A	0.5%	150mV	88%
HF200W-DT-A	27V 6.0A	0.5%	150mV	86%
	9V 3.0A	0.5%	120mV	
HF200W-DT-B	27V 6.0A	0.5%	150mV	83%
	12V 3.0A	0.5%	120mV	

300W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF300W-ST-27	27V 11.1A	0.5%	200mV	85%
HF300W-ST-48	48V 6.3A	0.5%	240mV	88%
HF300W-DT-B	27V 10.0A	0.5%	200mV	84%
	12V 3.0A	0.5%	120mV	

400W Single/ Dual Output

Model	DC Output	Load regul.	R&N	Efficiency
HF400W-ST-27	27V 15.0A	0.5%	200mV	86%
HF400W-ST-48	48V 8.3A	0.5%	240mV	88%
HF400W-DT-B	27V 15.0A	0.5%	200mV	84%
	12V 3.0A	0.5%	120mV	

For dual and triple output unit, it shows the output current range (min. ~ max.) of each output. But the total power shall not exceed the rated power.



We have more than 5,000 different models showing great flexibility. Custom design products are also available to meet your individual requirements.



20W LED Driver - Constant Current



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant current design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: over voltage/ short circuit
- 2 years warranty
- 118 × 35 × 26(mm)

AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output overload protection	± 5% current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.20kg/pcs

Model	DC Output	Current Tol.	R&N	Efficiency
HF20W-PLD-350	9~48V 350mA	± 5%	200mV	86%
HF20W-PLD-700	9~30V 700mA	± 5%	200mV	84%

60W LED Driver - Constant Current



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant current design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: over voltage/ short circuit
- 2 years warranty
- 162.5 × 42.5 × 32(mm)

AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output overload protection	± 5% current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.41kg/pcs

Model	DC Output	Current Tol.	R&N	Efficiency
HF60W-PLD-1050	9~48V 1050mA	± 5%	200mV	83%
HF60W-PLD-1400	9~42V 1400mA	± 5%	200mV	88%
HF60W-PLD-1750	9~34V 1750mA	± 5%	200mV	86%

35W LED Driver - Constant Current



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant current design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: over voltage/ short circuit
- 2 years warranty
- 148 × 40 × 30(mm)

AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Output overload protection	± 5% current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	50ms@full load (typical)
Hold up time	20ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.31kg/pcs

Model	DC Output	Current Tol.	R&N	Efficiency
HF35W-PLD-700	9~48V 700mA	± 5%	200mV	88%
HF35W-PLD-1050	9~30V 1050mA	± 5%	200mV	86%
HF35W-PLD-1400	9~24V 1400mA	± 5%	200mV	85%

20W LED Power Supply - Constant Voltage



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant voltage design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: overload/ over voltage/ short circuit
- 2 years warranty
- 118 × 35 × 26(mm)

AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Load regulation	± 0.5%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	clamping by zener diode
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	250ms@full load (typical)
Hold up time	50ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.20kg/pcs

Model	DC Output	Voltage Tol.	R&N	Efficiency
HF20W-PLV-12	12V 1.70A	± 3%	120mV	80%
HF20W-PLV-15	15V 1.33A	± 3%	120mV	81%
HF20W-PLV-24	24V 0.84A	± 3%	150mV	82%
HF20W-PLV-48	48V 0.42A	± 3%	150mV	84%

35W LED Power Supply - Constant Voltage



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant voltage design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: overload/ over voltage/ short circuit
- 2 years warranty
- 148 × 40 × 30(mm)

AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Load regulation	± 0.5%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	250ms@full load (typical)
Hold up time	50ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.31kg/pcs

Model	DC Output	Voltage Tol.	R&N	Efficiency
HF35W-PLV-12	12V 3.0A	± 3%	120mV	80%
HF35W-PLV-15	15V 2.4A	± 3%	120mV	80%
HF35W-PLV-24	24V 1.5A	± 3%	150mV	81%
HF35W-PLV-36	36V 1.0A	± 3%	150mV	82%
HF35W-PLV-48	48V 0.75A	± 3%	150mV	83%

60W LED Power Supply - Constant Voltage



- Universal AC input / full range
- Plastic cover, IP67 design
- Constant voltage design
- Isolation class 2, no PE
- High reliability, low cost
- Protections: overload/ over voltage/ short circuit
- 2 years warranty
- 162.5 × 42.5 × 32(mm)


AC input voltage range	90~264VAC (127~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 35A/115V, 70A/230V
Input leakage current	< 0.25mA/ 230VAC
Line regulation (full load)	≤ ± 0.5%
Load regulation	± 0.5%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Short circuit protection	hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.75KVAC/1min
Rise time	250ms@full load (typical)
Hold up time	50ms@full load (typical)
Operating temperature	-30°C~+50°C
Safety standards	design refer to UL1310 Class 2, UL8750 EN60950, EN61347
EMC standards	design refer to EN55015, EN55022 Class B EN61000-3-2 Class A, EN61000-3-3 EN55024, EN61547
Cooling method	convection
Weight	0.41kg/pcs

Model	DC Output	Voltage Tol.	R&N	Efficiency
HF60W-PLV-12	12V 5.0A	± 3%	150mV	82%
HF60W-PLV-15	15V 4.0A	± 3%	150mV	82%
HF60W-PLV-24	24V 2.5A	± 3%	200mV	83%
HF60W-PLV-48	48V 1.25A	± 3%	200mV	84%

5W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 76 × 45 × 22(mm)

- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air cooling convection
- 5 years limited warranty



CE

AC input voltage range	85~264VAC (120~370VDC)
Inrush current	cold start, 15A/115V, 30A/230V
Output voltage adjust range	± 10%
Output overload protection	built-in IC protection, hiccup mode, auto recovery
Output over voltage protection	clamping by zener diode
Over temp. protection	IC, Tj: 135°C, power shutdown
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	meet GB4943, UL60950, EN60950
EMC standards	meet GB9254, EN55022 class B, EN61000
Connection	2P/ 5.08mm, 2P/ 2.54mm pitch
Weight	0.05kg/pcs


Model	DC Output	Load regul.	R&N	Efficiency
HF5W-SPL-5	5V 1.0A	0.5%	80mV	69%
HF5W-SPL-12	12V 0.4A	0.5%	120mV	74%
HF5W-SPL-24	24V 0.2A	0.5%	150mV	75%
HF5W-SPL-48	48V 0.1A	0.5%	150mV	80%

* 3~48VDC output all available.

15W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Approvals: UL/CUL/CE
- 100 × 46.2 × 22(mm)

- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air cooling convection
- 5 years limited warranty



UL CE


AC input voltage range	85~264VAC (120~370VDC)
Inrush current	cold start, 15A/115V, 30A/230V
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	clamping by zener diode
Over temp. protection	IC, Tj: 135°C, power shutdown
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	GB4943, UL60950, EN60950
EMC standards	GB9254, EN55022 class B, EN61000
Connection	2P/ 5.08mm, 2P/ 3.96mm pitch
Weight	0.09kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF15W-SPL-5	5V 3.0A	0.5%	80mV	73%
HF15W-SPL-12	12V 1.3A	0.5%	120mV	82%
HF15W-SPL-24	24V 0.65A	0.5%	150mV	81%
HF15W-SPL-48	48V 0.32A	0.5%	150mV	85%

* 3~48VDC output all available.

15W Open Frame Series - On Board Type

- Assemble on the main PCB of the system
- Universal AC input / full range
- Miniature PCB structure
- 65 x 38 x 31(mm)
- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air cooling convection
- 5 years limited warranty

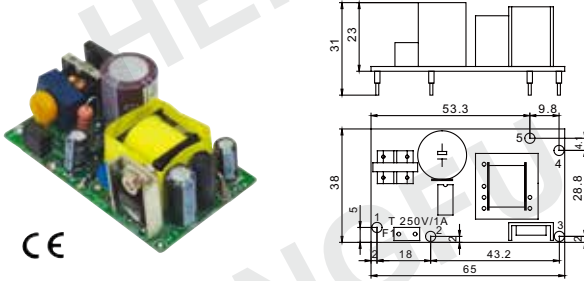


AC input voltage range 90~264VAC (127~370VDC)
 Input leakage current < 0.7mA/ 230VAC
 Output voltage adjustment not adjustable
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection clamping by zener diode
 Over temp. protection IC, Tj: 135°C, power shutdown
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 Rise, Hold up time 100ms, 5ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards design meet GB4943, UL60950, EN60950
 EMC standards design meet GB9254, EN55022 class A, EN61000
 Cooling method convection
 Weight 0.06kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF15W-SPM-5	5V 3.00A	± 3%	80mV	80%
HF15W-SPM-12	12V 1.25A	± 3%	120mV	82%
HF15W-SPM-15	15V 1.00A	± 3%	120mV	83%
HF15W-SPM-24	24V 0.63A	± 3%	150mV	83%

* 3.3~48VDC output all available.

35W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 107 x 61 x 28(mm)
- Protections: overload/ over voltage/ short circuit
- Free air cooling convection
- 5 years limited warranty

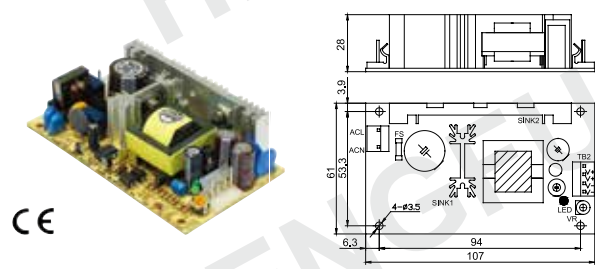


AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Output voltage adjust range ± 10%
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards meet GB4943, UL60950, EN60950
 EMC standards meet GB9254, EN55022 class B, EN61000
 Connection 2P/ 7.92mm, 4P/ 3.96mm pitch
 Weight 0.16kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF35W-SPL-5	5V 7.0A	0.5%	80mV	76%
HF35W-SPL-12	12V 2.9A	0.5%	120mV	81%
HF35W-SPL-24	24V 1.5A	0.5%	150mV	84%
HF35W-SPL-48	48V 0.7A	0.5%	150mV	83%

* 3~48VDC output all available.

25W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 107 x 61 x 28(mm)
- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air cooling convection
- 5 years limited warranty

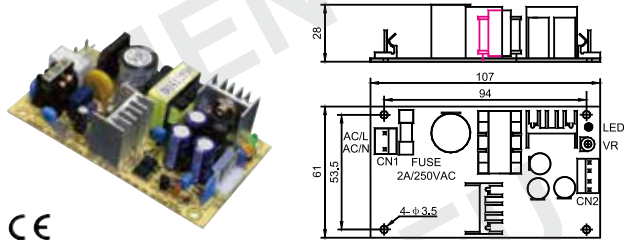


AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Output voltage adjust range ± 10%
 Output overload protection built-in IC protection, hiccup mode, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Over temp. protection IC, Tj: 135°C, power shutdown
 Withstand voltage I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards meet GB4943, UL60950, EN60950
 EMC standards meet GB9254, EN55022 class B, EN61000
 Connection 2P/ 7.92mm, 4P/ 3.96mm pitch
 Weight 0.13kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF25W-SPL-5	5V 5.0A	0.5%	80mV	74%
HF25W-SPL-12	12V 2.1A	0.5%	120mV	81%
HF25W-SPL-24	24V 1.1A	0.5%	150mV	81%
HF25W-SPL-48	48V 0.5A	0.5%	150mV	84%

* 3~48VDC output all available.

50W Single Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 195 x 55 x 23(mm)
- Protections: overload/ over voltage/ short circuit
- Free air cooling convection
- 5 years limited warranty

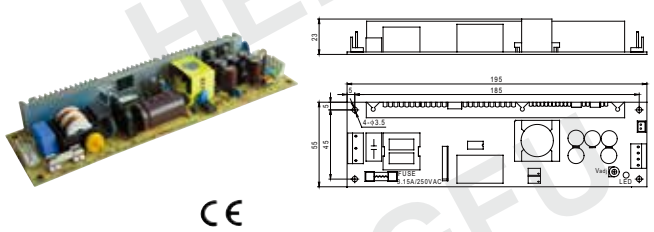


AC input voltage range 90~264VAC (127~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Line regulation (full load) ≤ ± 0.5%
 Output voltage adjust range ± 10%
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, hiccup mode, auto recovery
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards meet GB4943, UL60950, EN60950
 EMC standards meet GB9254, EN55022 class B, EN61000
 Connection 3P/ 7.92mm, 4P/ 3.96mm pitch
 Weight 0.22kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF50W-SPL-5	5V 10.0A	0.5%	80mV	79%
HF50W-SPL-12	12V 4.2A	0.5%	120mV	83%
HF50W-SPL-24	24V 2.1A	0.5%	150mV	85%
HF50W-SPL-48	48V 1.1A	0.5%	150mV	87%

* 3~48VDC output all available.

45W 1~3 Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 127 x 76.2 x 27(mm)
- Protections: overload/ over voltage/ short circuit
- Free air cooling convection
- 5 years limited warranty

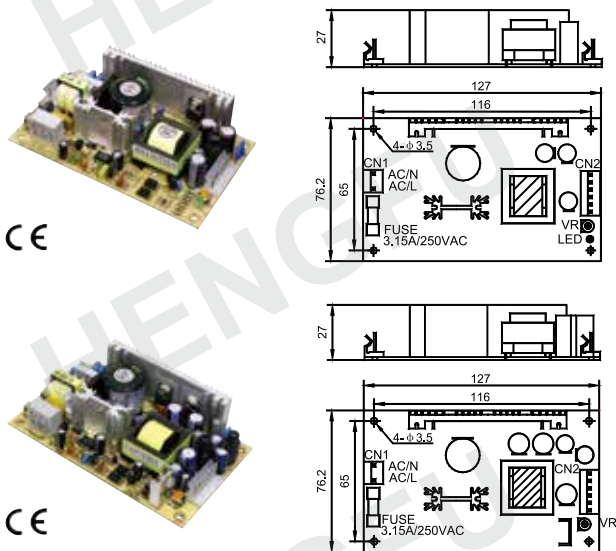

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Voltage tolerance $V_1: \leq \pm 1\%$, $V_2, V_3: \leq \pm 10\%$
 Output voltage adjust range single output: $\pm 10\%$, multi-output: $V_1: \pm 5\%$
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards meet GB4943, UL60950, EN60950
 EMC standards meet GB9254, EN55022 class B, EN61000
 Connection 2P/ 7.92mm, 6P/ 3.96mm pitch
 Weight 0.19kg/pcs (HF45W-SPL)

Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF45W-SPL-5	5V	8.0A	0.5%	80mV	70%
HF45W-SPL-12	12V	3.7A	0.5%	120mV	83%
HF45W-SPL-24	24V	1.9A	0.5%	150mV	85%
HF45W-SPL-48	48V	1.0A	0.5%	150mV	86%

* 3~48VDC output all available.

Dual Output


Model	DC Output		R&N	Efficiency
HF45W-DPL-A	5V	0.4~5.0A	80mV	79%
	12V	0.2~2.5A	120mV	
HF45W-DPL-B	5V	0.4~5.0A	80mV	77%
	24V	0.2~1.8A	150mV	

Triple Output

Model	DC Output		R&N	Efficiency
HF45W-TPL-B	5V	0.5~4.0A	80mV	75%
	+12V	0.3~1.5A	120mV	
	-12V	0.1~0.5A	120mV	
HF45W-TPL-C	5V	1.0~5.0A	80mV	75%
	+15V	0.2~1.0A	120mV	
	-15V	0.1~0.35A	120mV	

65W 1~3 Output Open Frame Series

- Universal AC input / full range
- High reliability
- Miniature PCB structure
- Built-in EMI filter
- 127 x 76.2 x 42(mm)
- Protections: overload/ over voltage/ short circuit
- Free air cooling convection
- 5 years limited warranty

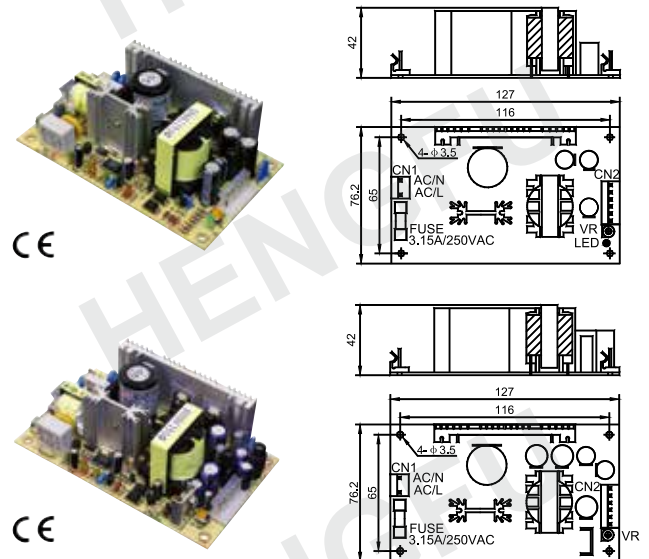

AC input voltage range 85~264VAC (120~370VDC)
 Inrush current cold start, 20A/115V, 40A/230V
 Input leakage current < 1mA/ 230VAC
 Voltage tolerance $V_1: \leq \pm 1\%$, $V_2, V_3: \leq \pm 10\%$
 Output voltage adjust range single output: $\pm 10\%$, multi-output: $V_1: \pm 5\%$
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 3.0KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise, Hold up time 50ms, 20ms@full load (typical)
 Operating temperature -20°C~+50°C
 Safety standards meet GB4943, UL60950, EN60950
 EMC standards meet GB9254, EN55022 class B, EN61000
 Connection 2P/ 7.92mm, 6P/ 3.96mm pitch
 Weight 0.25kg/pcs (HF65W-SPL)

Single Output

Model	DC Output		Load regul.	R&N	Efficiency
HF65W-SPL-5	5V	10.0A	0.5%	80mV	76%
HF65W-SPL-12	12V	5.2A	0.5%	120mV	85%
HF65W-SPL-24	24V	2.7A	0.5%	150mV	86%
HF65W-SPL-48	48V	1.35A	0.5%	150mV	87%

* 3~48VDC output all available.

Dual Output


Model	DC Output		R&N	Efficiency
HF65W-DPL-A	5V	0.4~7.0A	80mV	82%
	12V	0.2~3.2A	120mV	
HF65W-DPL-B	5V	0.4~6.0A	80mV	83%
	24V	0.2~2.6A	150mV	

Triple Output

Model	DC Output		R&N	Efficiency
HF65W-TPL-B	5V	0.4~5.0A	80mV	81%
	+12V	0.2~2.5A	120mV	
	-12V	0.1~0.5A	120mV	
HF65W-TPL-C	5V	1.0~6.0A	80mV	81%
	+15V	0.3~1.6A	120mV	
	-15V	0.1~0.7A	120mV	

100W Open Frame Series - with PFC

- Universal AC input / full range
- Protections: overload/ over voltage/ short circuit
- PF>0.98@115VAC; >0.94@230VAC
- 5 years limited warranty
- 222 x 62 x 35.5(mm)



PFC
ACTIVE **CE**



AC input voltage range	85~264VAC (120~370VDC)
Input frequency	47~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Output voltage adjust range	± 10%
Output overload protection	105~130%, current limiting, auto recovery
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P:3.0KVAC/1min;I/P-F/G:1.5KVAC/1min O/P-F/G:0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+40°C
Safety standards	meet GB4943, UL60950, EN60950
EMC standards	meet GB9254, EN55022 class B, EN61000
Cooling method	convection
Connection	3P/ 7.92mm, 8P/ 3.96mm pitch
Weight	0.42kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SPC-3.3	3.3V	20.0A	0.5%	100mV	71%
HF100W-SPC-5	5V	20.0A	0.5%	100mV	78%
HF100W-SPC-7.5	7.5V	13.5A	0.5%	100mV	81%
HF100W-SPC-12	12V	8.5A	0.5%	120mV	83%
HF100W-SPC-15	15V	6.7A	0.5%	120mV	84%
HF100W-SPC-24	24V	4.2A	0.5%	150mV	84%
HF100W-SPC-48	48V	2.1A	0.5%	150mV	86%

* 3~48VDC output all available.

100W Open Frame Series

- High reliability
- AC input range selected by switch
- Built-in EMI filter
- Free air cooling convection
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- 222 x 62 x 35.5(mm)



C E


AC input voltage range	85~132/ 170~264VAC selected by switch
Input frequency	40~63Hz
Inrush current	cold start, 20A/115V, 40A/230V
Input leakage current	< 1mA/ 230VAC
Output voltage adjust range	± 10%
Output overload protection	105~130%, shut off, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20°C~+50°C
Safety standards	meet GB4943, UL60950, EN60950
EMC standards	meet GB9254, EN55022 class B, EN61000
Cooling method	convection
Connection	3P/ 7.92mm, 8P/ 3.96mm pitch
Weight	0.41kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF100W-SPF-5	5V	20.0A	0.5%	100mV	77%
HF100W-SPF-12	12V	8.5A	0.5%	120mV	81%
HF100W-SPF-15	15V	6.7A	0.5%	120mV	82%
HF100W-SPF-24	24V	4.2A	0.5%	150mV	84%
HF100W-SPF-48	48V	2.1A	0.5%	150mV	85%

* 3~48VDC output all available.

150W U-Bracket Series

- High reliability
- AC input range selected by switch
- Built-in EMI filter
- Free air cooling convection
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- 206 x 103 x 38(mm)



C€


AC input voltage range	85~132/ 170~264VAC selected by switch
Inrush current	cold start, 20A/115V, 40A/230V
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	$\pm 10\%$
Output overload protection	105~130%, shut off, re-power on to recover
Output over voltage protection	115~150%, shut off, re-power on to recover
Withstand voltage	I/P -O/P: 3.0KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards	meet GB4943, UL60950, EN60950
EMC standards	meet GB9254, EN55022 class B, EN61000
Connection	3P, 4P/ 9.5mm pitch, terminal block

Model	DC Output		Load regul.	R&N	Efficiency
HF150W-SUF-5	5V	30.0A	0.5%	100mV	79%
HF150W-SUF-12	12V	12.5A	0.5%	120mV	85%
HF150W-SUF-15	15V	10.0A	0.5%	120mV	85%
HF150W-SUF-24	24V	6.5A	0.5%	150mV	86%
HF150W-SUF-48	48V	3.1A	0.5%	150mV	86%

* 3~48VDC output all available.

200W Open Frame Series - with PFC

- Universal AC input / full range
- PF>0.98@115VAC; >0.94@230VAC
- High power density 9.78W/inch³
- High efficiency
- ZVS technology to reduce power dissipation
- Protections: overload/ over voltage/ over temperature/ short circuit
- Free air convection for 150W and 200W with 20.5 CFM forced air
- 5 years limited warranty
- 127 x 76.2 x 36(mm)




AC input voltage range	85~264VAC (120~370VDC)
Inrush current	cold start, 20A/115V, 40A/230V
Output voltage adjust range	± 10%
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 3.0KVAC/1min; I/P-F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Rise, Hold up time	50ms, 20ms@full load (typical)
Operating temperature	-20℃~+50℃
Safety standards	meet GB4943, UL60950, EN60950
EMC standards	meet GB9254, EN55022 class B, EN61000
Connection	2P/ 7.92mm, 8P/ 3.96mm pitch
Weight	0.38kg/pcs

Model	DC Output		Load regul.	R&N	Efficiency
HF200W-SPC-5	5V	36.0A	0.5%	100mV	81%
HF200W-SPC-12	12V	16.6A	0.5%	120mV	85%
HF200W-SPC-24	24V	8.3A	0.5%	150mV	87%
HF200W-SPC-48	48V	4.2A	0.5%	150mV	87%

* 3~48VDC output all available.

50W~60W DC/DC for Vehicle LCD

- Wide DC input range
- High reliability, low cost
- 127 x 70 x 32(mm)
- Protections: overload/ short circuit
- 5 years limited warranty

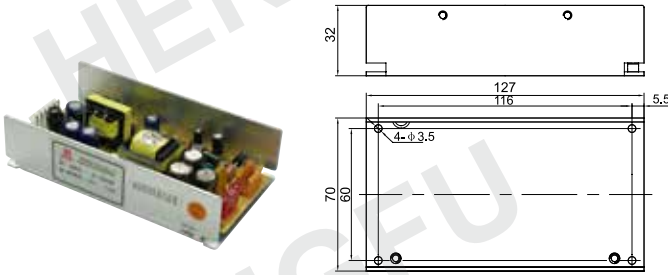


DC input voltage range.....24(9~36)VDC, 48(36~72)VDC
 Line regulation..... $\pm 1\%$
 Output voltage tolerance..... $\pm 3\%$
 Output overload protection.....115~180% at min. Vin, hiccup mode, auto recovery
 Withstand voltage.....I/P -O/P: 1.5KVAC/1min
 Rise time.....50ms@full load (typical)
 Operating temperature.....-20°C~+50°C
 Safety standards.....design refer to LVD
 Cooling method.....convection
 Connection.....4P/ 3.96mm pitch
 6P/ 3.96mm pitch

Model	DC Output	Load regul.	R&N	Efficiency
HF50W-SUD**-5	5V 10.0A	1.0%	80mV	73%
HF50W-SUD**-12	12V 3.7A	1.0%	120mV	83%
HF50W-SUD**-24	24V 2.1A	1.0%	150mV	84%
HF60W-SUD**-5	5V 12.0A	1.0%	80mV	72%
HF60W-SUD**-12	12V 5.0A	1.0%	120mV	81%

**means DC input voltage, such as 24, 48, etc.

100W DC/DC U-Bracket Series

- High reliability
- Input over voltage protection
- Input below voltage protection
- 201 x 95 x 39(mm)
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty

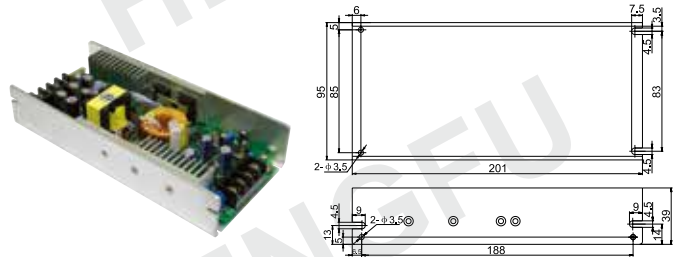


DC input voltage range.....12(10~18)VDC, 24(18~36)VDC
 Line regulation (full load)..... $\leq \pm 0.5\%$
 Output voltage adjust range..... $\pm 10\%$
 Output overload protection.....105~150%, hiccup mode, auto recovery
 Output over voltage protection.....115~150%, hiccup mode, auto recovery
 Withstand voltage.....I/P -O/P: 1.5KVAC/1min
 Rise time.....50ms@full load (typical)
 Operating temperature.....-20°C~+50°C
 Safety standards.....design refer to LVD
 Cooling method.....convection
 Connection.....4P/ 9.5mm pitch
 4P/ 9.5mm pitch, terminal block
 Weight.....0.75kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF100W-SUD**-5	5V 20.0A	1.0%	100mV	75%
HF100W-SUD**-12	12V 9.0A	0.5%	120mV	73%
HF100W-SUD**-24	24V 4.5A	0.5%	150mV	76%

**means DC input voltage, such as 12, 24, etc.

60W Single Output Open Frame Series

- High reliability, low cost
- Miniature PCB structure
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- 195 x 55 x 28(mm)

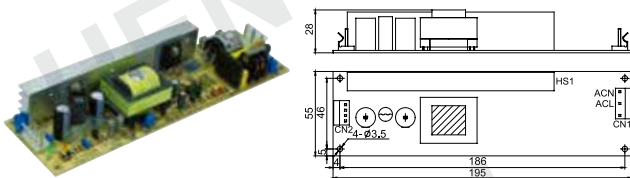


AC input voltage range.....170~264VAC (210~370VDC)
 Inrush current.....cold start, 40A/230V
 Line regulation (full load)..... $\leq \pm 0.5\%$
 Output voltage adjust range..... $\pm 10\%$
 Output overload protection.....105~150%, hiccup mode, auto recovery
 Withstand voltage.....I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Rise time.....50ms@full load (typical)
 Hold up time.....20ms@full load (typical)
 Operating temperature.....-20°C~+50°C
 Safety standards.....design meet GB4943, UL60950, EN60950
 Connection.....3P/ 7.92mm, 4P/ 3.96mm pitch
 Weight.....0.21kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF60W-SP-12	12V 5.0A	0.5%	120mV	81%
HF60W-SP-15	15V 4.0A	0.5%	120mV	82%
HF60W-SP-24	24V 2.5A	0.5%	150mV	83%
HF60W-SP-48	48V 1.3A	0.5%	150mV	86%

* 12~48VDC output all available.

Custom Design Products

ODM welcome - our strong R&D team are ready to design custom made power supplies to meet your individual requirements.

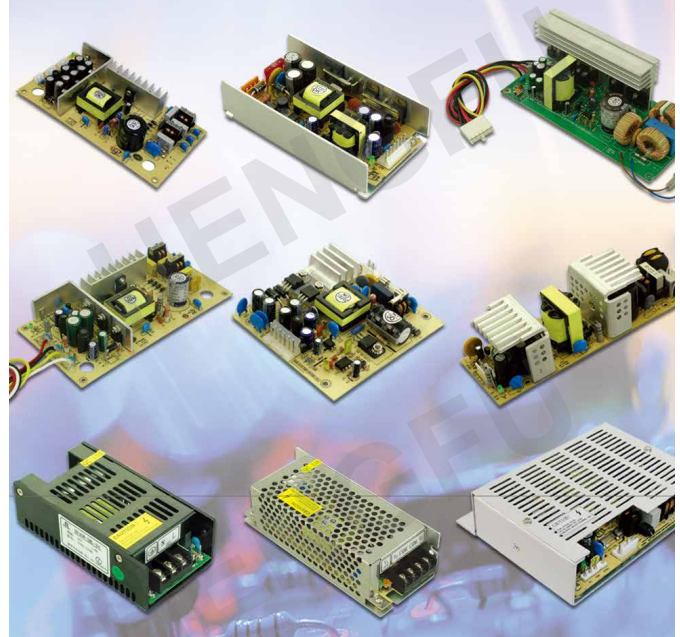

10W DC/DC Series



- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F601 100 × 58 × 31(mm)

DC input voltage	12VDC, 24VDC, 48VDC, 90VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$ multi-output: $V_i \pm 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance.....	$> 100M\Omega @ 500VDC$
Operating temperature	-20℃~+50℃
Safety standards.....	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF10W-SD**-5	5V	2.0A	80mV	± 1%
HF10W-SD**-12	12V	1.0A	120mV	± 1%
HF10W-SD**-24	24V	0.5A	150mV	± 1%
HF10W-DD**-A	5V	0.2~1.8A	80mV	± 1%
	12V	0.1~0.5A	120mV	± 3%
HF10W-DD**-B	5V	0.2~1.8A	80mV	± 1%
	24V	0.05~0.3A	150mV	± 3%

**means DC input voltage, such as 12, 24, 48, 90, 110, etc.

20W DC/DC Series




- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F602 111 × 78 × 36(mm)

DC input voltage	12VDC, 24VDC, 48VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$ multi-output: $V_1: \pm 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance	> 100M Ω @500VDC
Operating temperature	-20°C~+50°C
Safety standards	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF20W-SD**-5	5V	4.0A	80mV	± 1%
HF20W-SD**-12	12V	2.0A	120mV	± 1%
HF20W-SD**-24	24V	1.0A	150mV	± 1%
HF20W-DD**-A	5V	0.4~2.0A	80mV	± 1%
	12V	0.0~1.0A	120mV	± 3%
HF20W-TD**-A	5V	0.4~2.0A	80mV	± 1%
	+12V	0.0~0.5A	120mV	± 3%
	-12V	0.0~0.35A	120mV	± 3%

**means DC input voltage, such as 12, 24, 48, 90, 110, etc.

30W DC/DC Series




- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

DC input voltage	12VDC, 24VDC, 48VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$ multi-output: $V_i \leq 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance	> 100M Ω @500VDC
Operating temperature	-20°C~+50°C
Safety standards	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF30W-SD**-12	12V	2.5A	120mV	± 1%
HF30W-SD**-24	24V	1.3A	150mV	± 1%
HF30W-DD**-A	5V	0.5~3.2A	80mV	± 1%
	12V	0.0~2.0A	120mV	± 3%
HF30W-DD**-B	15V	0.2~1.0A	120mV	± 1%
	-15V	0.0~1.0A	120mV	± 3%
	5V	0.5~3.5A	80mV	± 1%
HF30W-TD**-A	+12V	0.1~1.2A	120mV	± 3%
	-12V	0.1~0.8A	120mV	± 10%

**means DC input voltage, such as 12, 24, 48, 110, etc.

40W DC/DC Series



- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F603 129 × 98 × 40(mm)

DC input voltage	24VDC, 48VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$ multi-output: $V_i \leq 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P -F/G: 0.5KVAC/1min
Isolation resistance	$> 100M\Omega @ 500VDC$
Operating temperature	-20°C~+50°C
Safety standards	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF40W-SD**-5	5V	8.0A	80mV	± 1%
HF40W-SD**-12	12V	3.3A	120mV	± 1%
HF40W-SD**-24	24V	1.6A	150mV	± 1%
HF40W-TD**-A	5V	0.4~2.0A	80mV	± 1%
	+12V	0.0~1.5A	120mV	± 3%
	-12V	0.0~1.0A	120mV	± 10%

**means DC input voltage, such as 24, 48, 110, etc.


The company keeps on strict quality control under ISO9001 quality system certified by SGS.



Reliable Products & Best Services
We have full confidence to be your trustworthy
power partner.



50W~60W DC/DC Series




- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)

DC input voltage	12VDC, 24VDC, 48VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$ multi-output: $V_1: \pm 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance	> 100M Ω @500VDC
Operating temperature	-20 $^{\circ}$ C~+50 $^{\circ}$ C
Safety standards	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF50W-SD**-5	5V	10.0A	80mV	± 1%
HF50W-SD**-12	12V	4.2A	120mV	± 1%
HF50W-SD**-24	24V	2.1A	150mV	± 1%
HF50W-DD**-A	5V	1.0~6.0A	80mV	± 1%
	12V	0.0~2.0A	120mV	± 3%
HF50W-DD**-B	15V	0.3~1.7A	120mV	± 1%
	-15V	0.0~1.7A	120mV	± 3%
HF50W-TD**-A	5V	0.5~5.0A	80mV	± 1%
	+12V	0.2~2.0A	120mV	± 3%
	-12V	0.2~1.5A	120mV	± 10%
HF60W-SD**-5	5V	12.0A	80mV	± 1%
HF60W-SD**-12	12V	5.0A	120mV	± 1%
HF60W-SD**-24	24V	2.5A	150mV	± 1%
HF60W-SD**-48	48V	1.3A	150mV	± 1%
HF60W-DD**-A	12V	0.5~4.0A	120mV	± 1%
	5V	0.0~2.0A	80mV	± 3%

**means DC input voltage, such as 12, 24, 48, 110, etc.

70W DC/DC Series



- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty
- F605 160 × 98 × 39(mm)
- F608 146 × 81 × 38(mm) (option)

DC input voltage.....	24VDC, 48VDC, 110VDC
Line regulation (full load).....	$\leq \pm 0.5\%$
Output voltage adjust range	single output: $\pm 10\%$, multi-output: $V_i: \pm 5\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance.....	$> 100M\Omega$ @500VDC
Operating temperature	-20°C~+50°C
Safety standards.....	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Output		R&N	Voltage Tol.
HF70W-SD**-12	12V	6.0A	120mV	± 1%
HF70W-SD**-15	15V	4.7A	120mV	± 1%
HF70W-SD**-24	24V	3.0A	150mV	± 1%
HF70W-DD**-A	12V	1.0~5.0A	120mV	± 1%
	5V	0~2.0A	80mV	± 3%
HF70W-TD**-A	5V	1.0~5.0A	120mV	± 1%
	+12V	0.0~2.0A	80mV	± 3%
	-12V	0.0~1.0A	80mV	± 3%

**means DC input voltage, such as 24, 48, 110, etc.

100W~200W DC/DC Series



- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Protections: overload/ short circuit
- 5 years limited warranty

DC input voltage.....	24VDC, 48VDC, 110VDC
Line regulation (full load)	$\leq \pm 0.5\%$
Output voltage adjust range	$\pm 10\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance.....	> 100M Ω @500VDC
Operating temperature	-20°C~+50°C
Safety standards.....	design refer to GB4943, UL60950, EN60950
Cooling method	convection

100W Single Output

・ F610 199 × 98 × 39(mm)

Model	DC Output		Load regul.	R&N	Voltage Tol.
HF100W-SD**-5	5V	20.0A	0.5%	100mV	± 1%
HF100W-SD**-12	12V	8.5A	0.5%	120mV	± 1%
HF100W-SD**-24	24V	4.2A	0.5%	150mV	± 1%
HF100W-SD**-48	48V	2.1A	0.5%	150mV	± 1%

150W Single Output

- ・ F615 199 × 98 × 50(mm)

Model	DC Output		Load regul.	R&N	Voltage Tol.
HF150W-SD**-12	12V	12.5A	0.5%	120mV	± 1%
HF150W-SD**-24	24V	6.3A	0.5%	150mV	± 1%
HF150W-SD**-48	48V	3.1A	0.5%	150mV	± 1%

200W Single Output

- F620 200 × 110 × 50(mm)

Model	DC Output		Load regul.	R&N	Voltage Tol.
HF200W-SD**-5	5V	30.0A	0.5%	100mV	± 1%
HF200W-SD**-12	12V	16.7A	0.5%	120mV	± 1%
HF200W-SD**-24	24V	8.4A	0.5%	150mV	± 1%
HF200W-SD**-48	48V	4.2A	0.5%	150mV	± 1%

**means DC input voltage, such as 24, 48, 110, etc.

200W DC/DC Mini-size Series



- 2:1 wide input range
- Top brand components for key parts
- Input over/ below voltage protection
- Input polarity protection
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F620DC 199 × 99 × 50(mm)

Line regulation (full load)	$\leq \pm 0.5\%$
Load regulation	$\leq \pm 0.5\%$
Output voltage adjust range	$\pm 10\%$
Output overload protection	105~150%, hiccup mode, auto recovery
Output over voltage protection	115~150%, hiccup mode, auto recovery
Withstand voltage	I/P -O/P: 1.5KVAC/1min I/P -F/G: 1.5KVAC/1min O/P-F/G: 0.5KVAC/1min
Isolation resistance	> 100M Ω @500VDC
Operating temperature	-20 $^{\circ}$ C ~+50 $^{\circ}$ C
Safety standards	design refer to GB4943, UL60950, EN60950
Cooling method	convection

Model	DC Input	DC Output		R&N	Efficiency
HF200W-SMD**-12	19~36V	12V	16.7A	120mV	82%
HF200W-SMD**-24	19~36V	24V	8.4A	150mV	85%
HF200W-SMD**-12	36~72V	12V	16.7A	120mV	84%
HF200W-SMD**-24	36~72V	24V	8.4A	150mV	86%
HF200W-SMD**-12	72~144V	12V	16.7A	120mV	82%
HF200W-SMD**-24	72~144V	24V	8.4A	150mV	84%

300W DC/DC Series



- High reliability
- Top brand components for key parts
- Forced air cooling by built-in fan
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630D 215 × 115 × 50(mm)

DC input voltage 24VDC, 48VDC, 110VDC
 Line regulation (full load) $\leq \pm 0.5\%$
 Output voltage adjust range $\pm 10\%$
 Output overload protection 105~150%, hiccup mode, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Isolation resistance > 100M Ω @500VDC
 Operating temperature -20°C~+50°C
 Safety standards design refer to GB4943, UL60950, EN60950
 Cooling method fan

Model	DC Output	Load regul.	R&N	Voltage Tol.
HF300W-SD**-12	12V 25.0A	0.5%	150mV	$\pm 1\%$
HF300W-SD**-15	15V 20.0A	0.5%	150mV	$\pm 1\%$
HF300W-SD**-24	24V 12.5A	0.5%	150mV	$\pm 1\%$
HF300W-SD**-48	48V 6.3A	0.5%	240mV	$\pm 1\%$

**means DC input voltage, such as 24, 48, 110, etc.

300W DC/DC for Railway Application



- Full DC input range
- Half encapsulated, compact size
- Top brand components for key parts
- Free air convection cooling
- Protections: overload/ over voltage/ over temperature/ short circuit
- 2 years warranty
- F630G 216 × 97 × 40(mm)

DC input voltage 68~140VDC
 Line regulation (full load) $\leq \pm 0.5\%$
 Input current 3.2A/110VDC
 Output voltage adjust range $\pm 10\%$
 Output overload protection 105~135%, constant current limiting, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Over temperature protection shut down, auto recovery after temperature goes down
 Withstand voltage I/P -O/P: 4.0KVAC/1min
 I/P -F/G: 2.5KVAC/1min
 O/P-F/G: 2.5KVAC/1min
 Rise time 50ms@full load (typical)
 Isolation resistance > 100M Ω @500VDC
 Operating temperature -20°C~+70°C (refer to the derating curve)
 Safety standards design refer to GB4943, UL60950, EN60950
 Cooling method convection
 Weight 1.16kg/pcs

Model	DC Output	Load regul.	R&N	Efficiency
HF300W-SD110-24A	24V 12.5A	0.5%	150mV	88%



ISO9001 Certificate / 证书 Trademark License / 证书 ROHS Certificate / 证书

350W~500W DC/DC Mini-size Series



- 2:1 wide input range
- Built-in fan speed control
- Built-in remote sense (option)
- Remote ON/OFF control (option)
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F630D 215 × 115 × 50(mm)

Line regulation (full load) $\leq \pm 0.5\%$
 Load regulation $\leq \pm 0.5\%$
 Output voltage adjust range $\pm 10\%$
 Output overload protection 105~130%, delay shutdown, re-power on to recover
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Isolation resistance > 100M Ω @500VDC
 Operating temperature -20°C~+50°C
 Safety standards design refer to GB4943, UL60950, EN60950
 Cooling method fan

Model	DC Input	DC Output	R&N	Efficiency
HF350W-SMD**-12	19~36V	12V 27.5A	150mV	80%
HF350W-SMD**-24	19~36V	24V 14.6A	150mV	80%
HF350W-SMD**-12	36~72V	12V 27.5A	150mV	81%
HF350W-SMD**-24	36~72V	24V 14.6A	150mV	81%
HF350W-SMD**-12	72~144V	12V 29.2A	150mV	83%
HF350W-SMD**-24	72~144V	24V 14.6A	150mV	87%
HF500W-SMD**-12	19~72V	12V 40.0A	150mV	86%
HF500W-SMD**-24	19~72V	24V 21.0A	150mV	88%
HF500W-SMD**-12	72~144V	12V 40.0A	150mV	87%
HF500W-SMD**-24	72~144V	24V 21.0A	150mV	89%

500W~1000W DC/DC Series




- High reliability
- Top brand components for key parts
- Built-in EMI filter
- Forced air cooling by built-in fan
- Protections: overload/ over voltage/ over temperature/ short circuit
- 5 years limited warranty
- F650 250 × 160 × 87(mm)


DC input voltage 48VDC, 110VDC
 Line regulation (full load) $\leq \pm 0.5\%$
 Output voltage adjust range $\pm 10\%$
 Output overload protection 105~130%, current limiting, auto recovery
 Output over voltage protection 115~150%, shut off, re-power on to recover
 Withstand voltage I/P -O/P: 1.5KVAC/1min
 I/P -F/G: 1.5KVAC/1min
 O/P-F/G: 0.5KVAC/1min
 Isolation resistance > 100M Ω @500VDC
 Operating temperature -20°C~+50°C
 Safety standards design refer to GB4943, UL60950, EN60950
 Cooling method fan

Model	DC Output	Load regul.	R&N	Voltage Tol.
HF500W-SD**-12	12V 42A	0.5%	150mV	$\pm 1\%$
HF500W-SD**-24	24V 21A	0.5%	150mV	$\pm 1\%$
HF500W-SD**-48	48V 11A	0.5%	240mV	$\pm 1\%$
HF600W-SD**-48	48V 13A	0.5%	240mV	$\pm 1\%$
HF700W-SD**-24	24V 29A	0.5%	150mV	$\pm 1\%$
HF800W-SD**-24	24V 35A	0.5%	150mV	$\pm 1\%$
HF800W-SD**-48	48V 17A	0.5%	240mV	$\pm 1\%$
HF1000W-SD**-24	24V 42A	0.5%	150mV	$\pm 1\%$
HF1000W-SD**-48	48V 21A	0.5%	240mV	$\pm 1\%$


**means DC input voltage, such as 48, 110, etc.

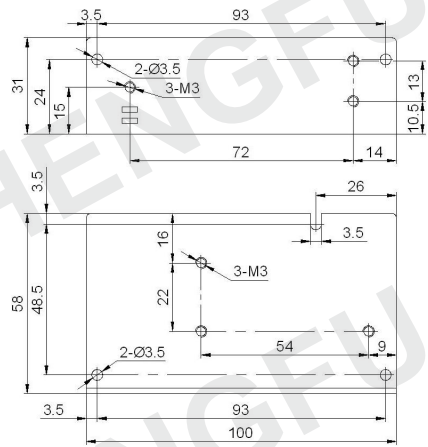


F601

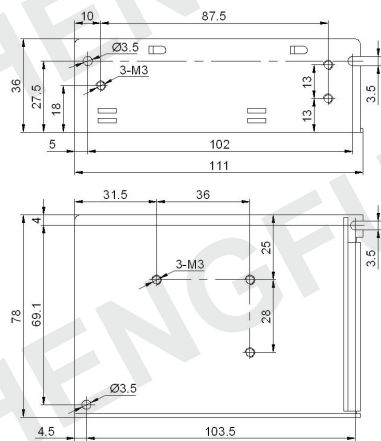


F602

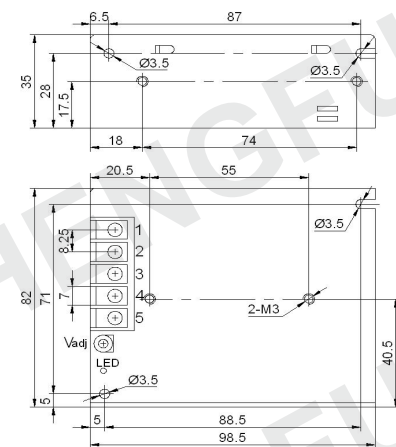


F6025SL

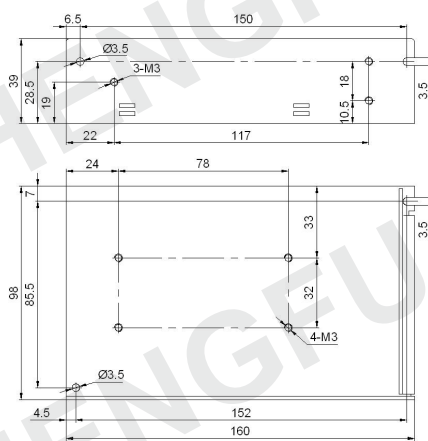


F605

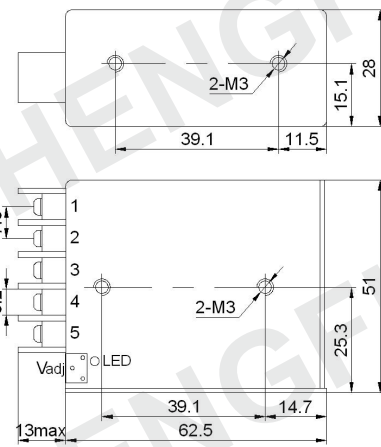


F6015MW

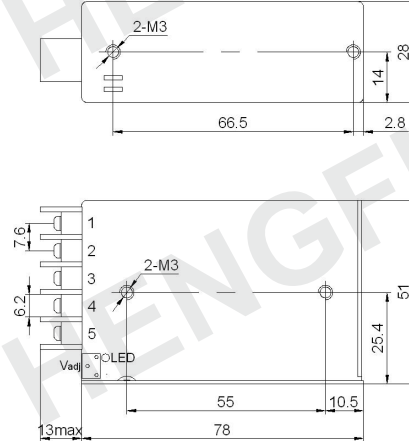


F6025MW

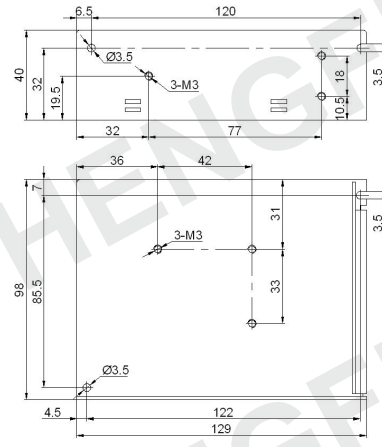


F603

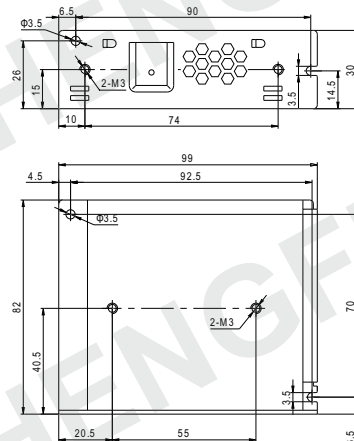


F605LSM

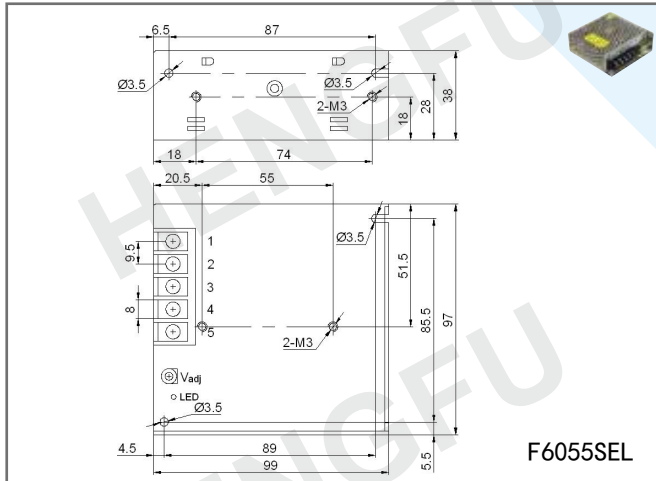


F6055SEL

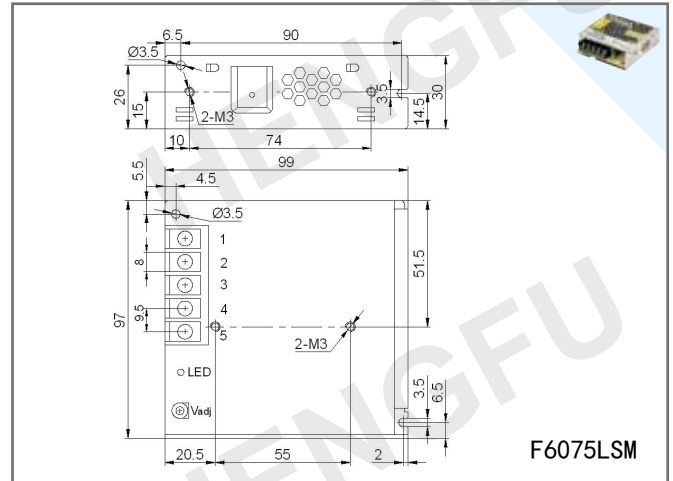


F6075LSM

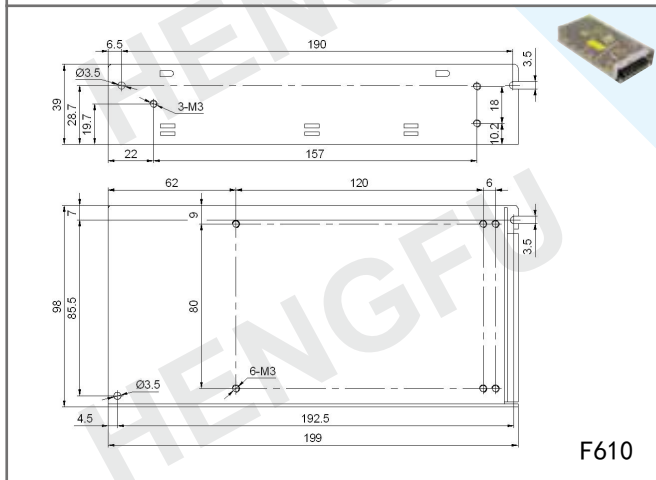


F610

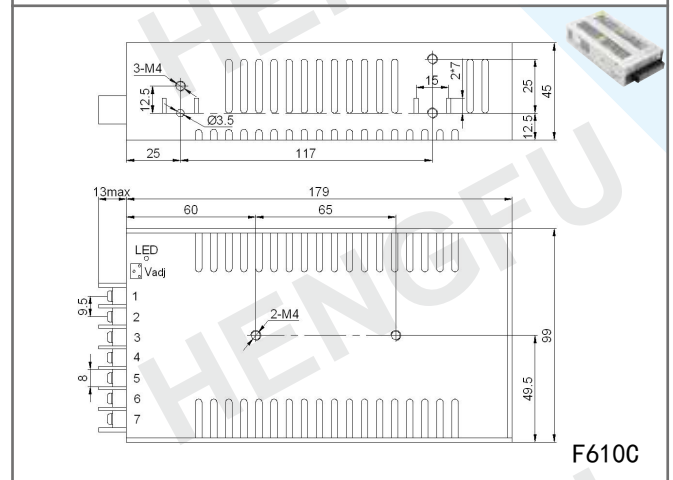


F610C

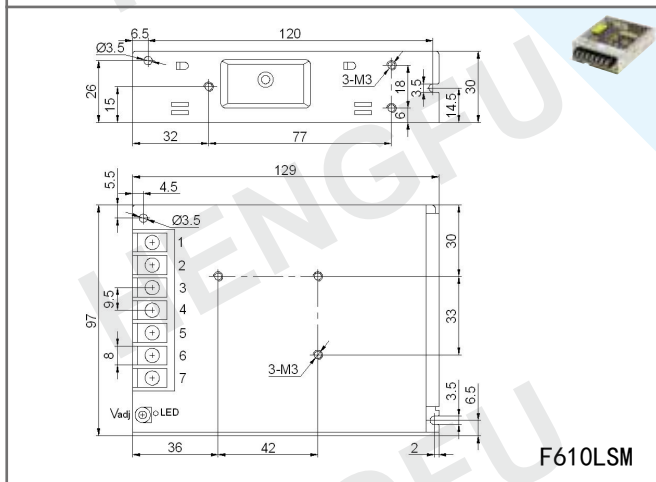


F610LSM

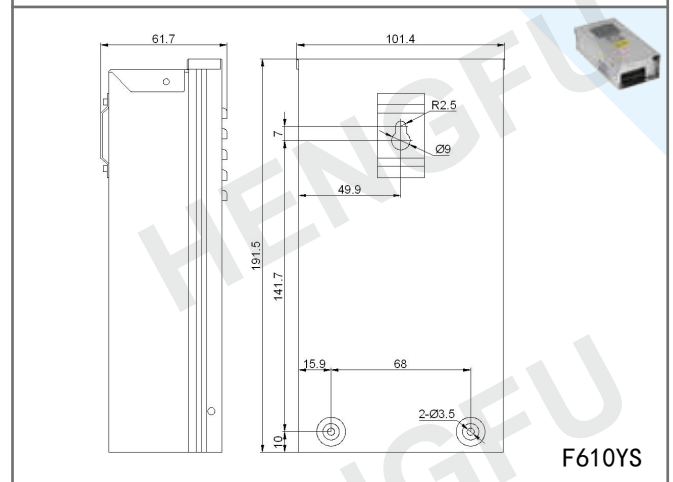


F610YS

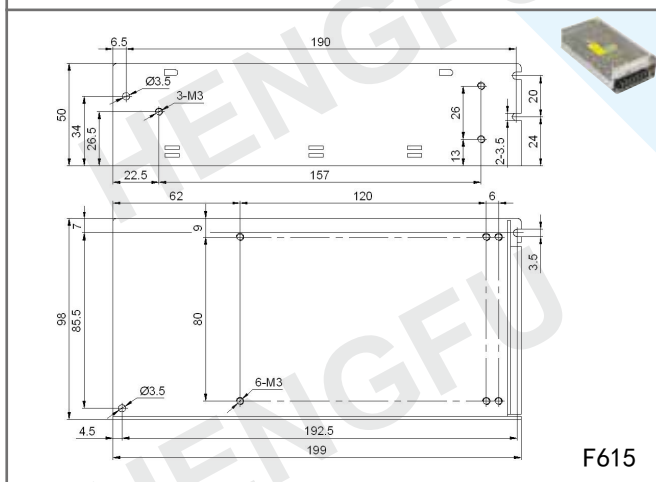


F615

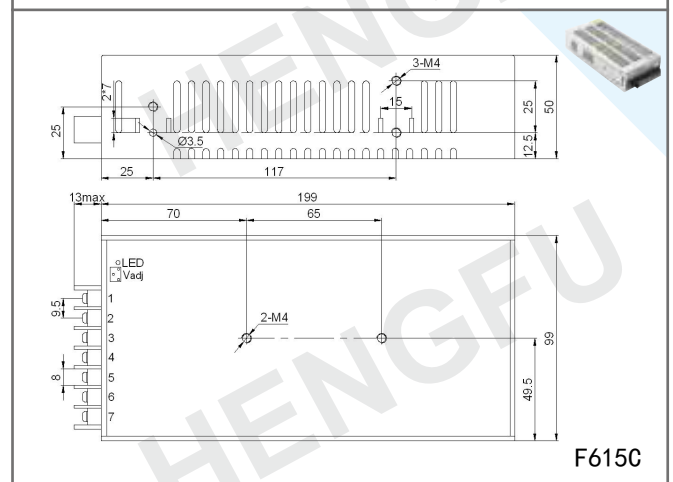


F615C

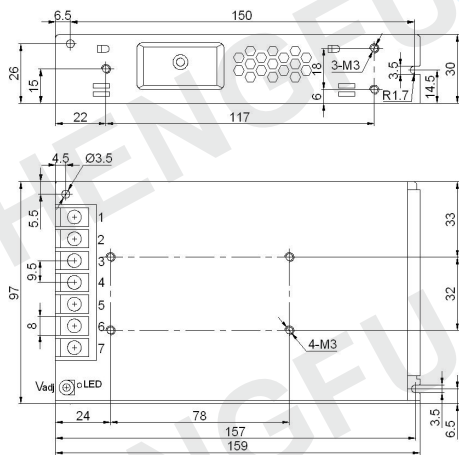


F615LSM

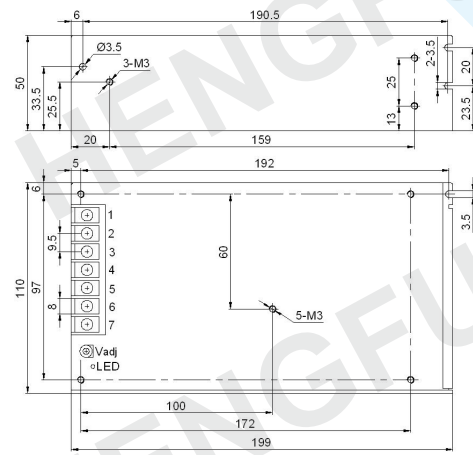


F615UL

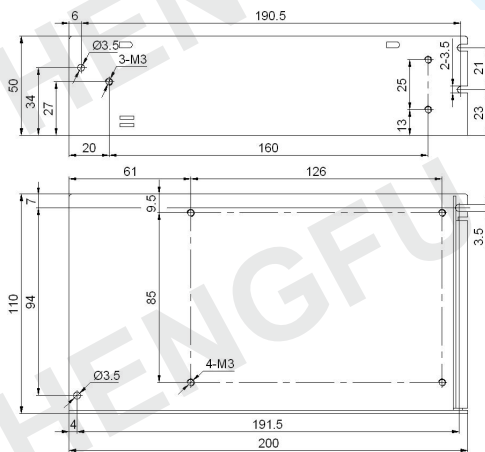


F620

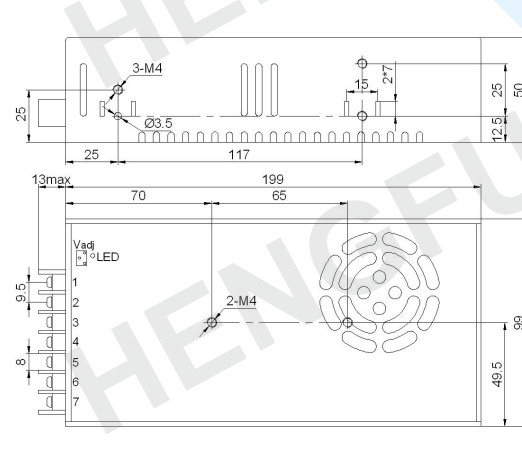


F620C

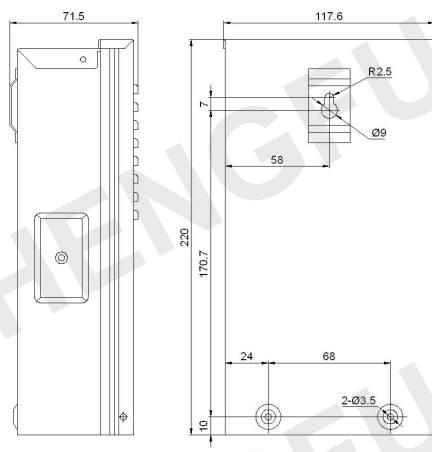


F620YS

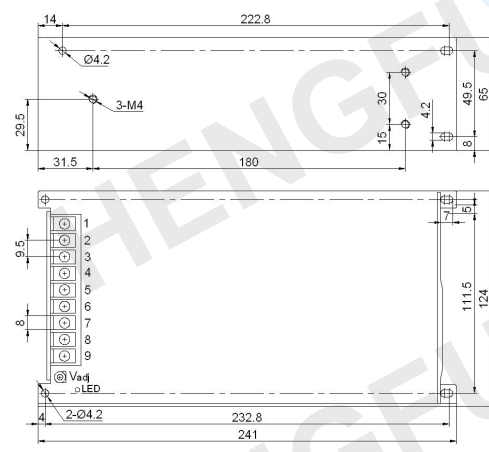









F630

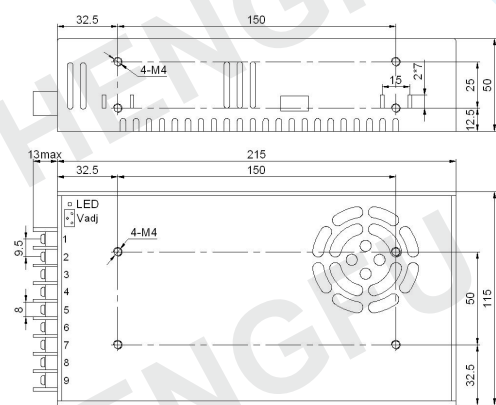

F630C

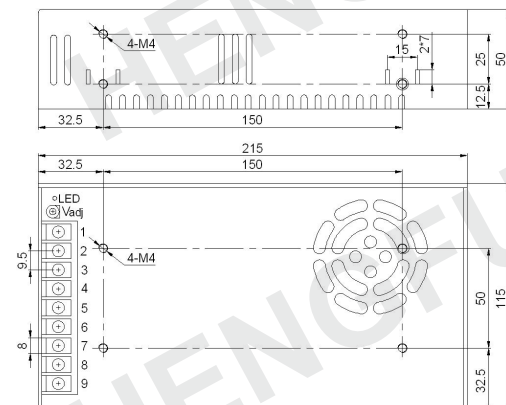

F635A

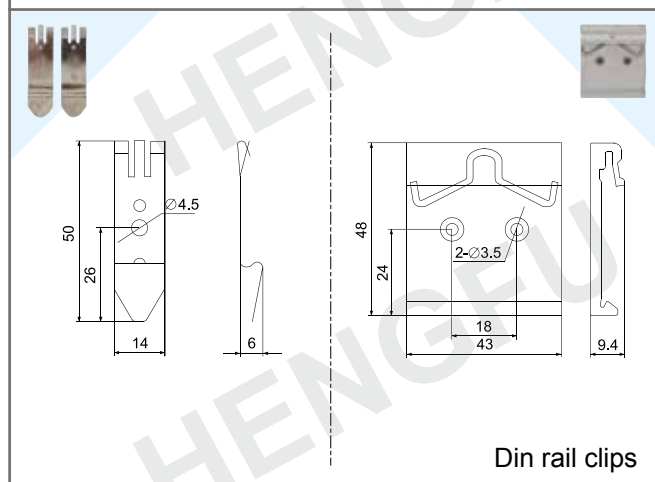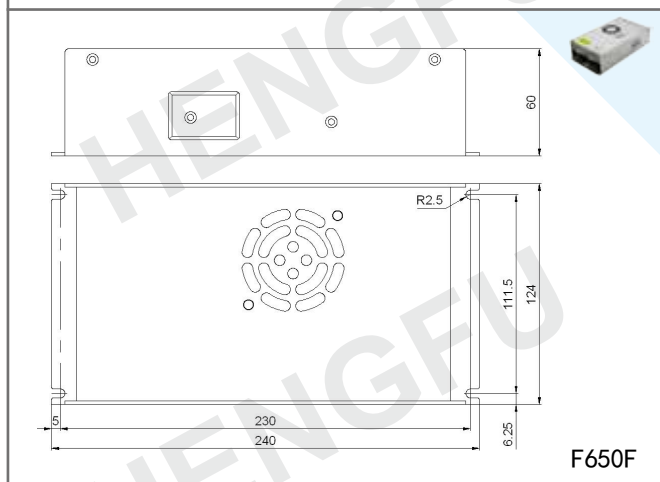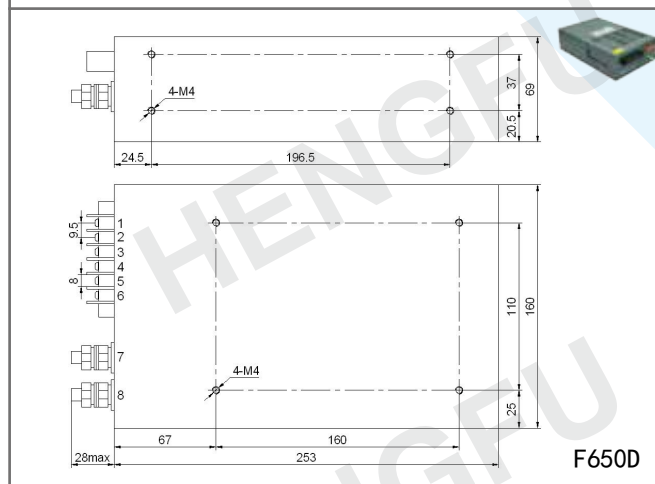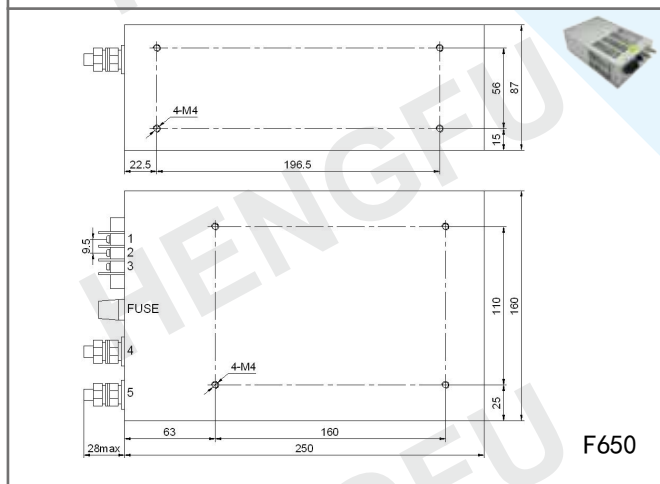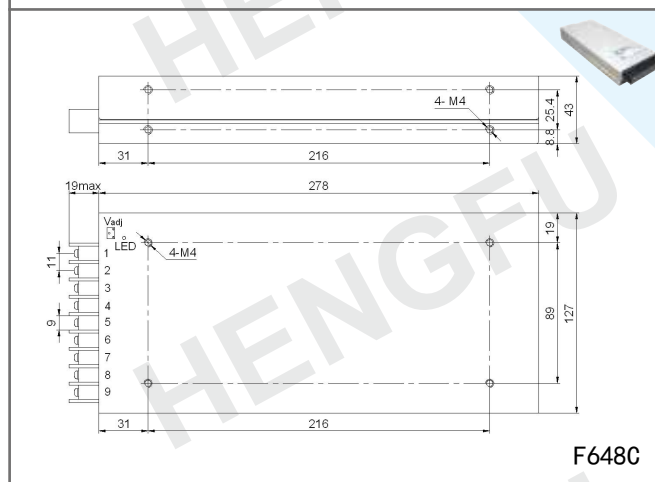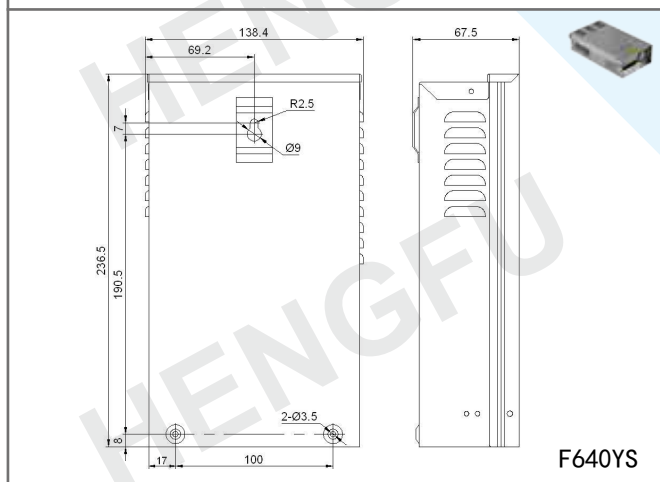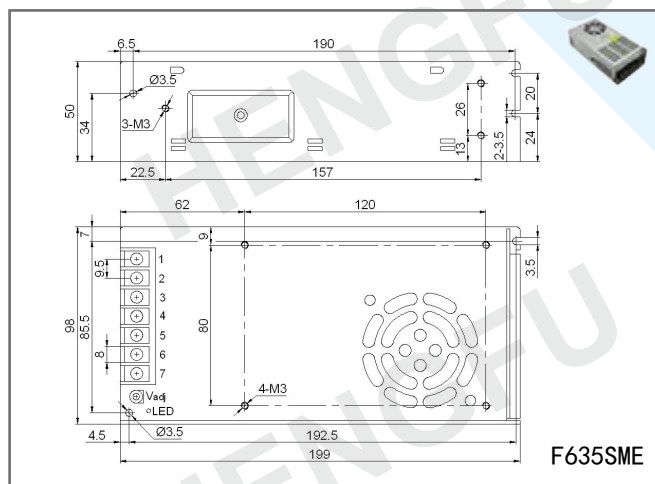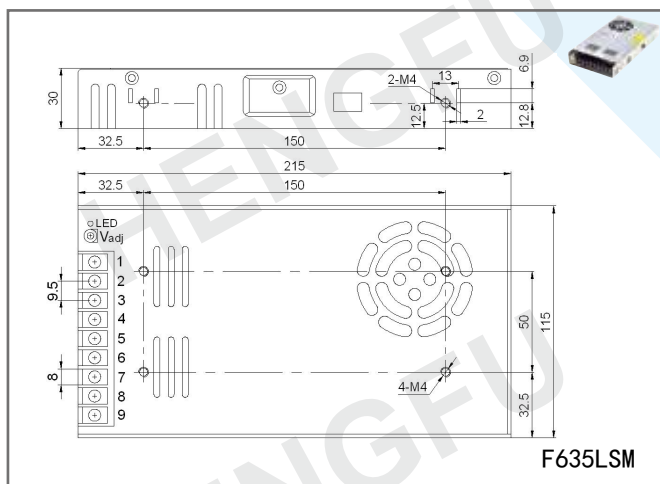

Technical Instructions & Safety Precautions (使用说明和注意事项) :

1. Test condition:

- (1) All parameters are measured at rated input, rated load and 25°C of ambient temperature.
- (2) Line regulation is measured from low line to high line at rated load.
- (3) Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
- (4) Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
- (5) The power supply is regarded as a component which will be installed into the final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

2. Input voltage: Normally, power supplies with AC input can also be applied to DC input. The DC input voltage range shall be 120-370VDC when the AC input voltage range is 85-264VAC; and 210-370VDC when the AC input voltage range is 170-264VAC, or 85-132VAC/170-264VAC selected by switch.

3. Input inrush current: is the maximum peak current when cold start of the power supply.

4. Leakage current: When several sets of power supplies are connected to ground at the same place, the leakage current will be redoubled accordingly. Care must be taken to avoid electric shock.

5. Output ripple and noise:

As shown in fig.1, the ripple and noise of a switching power supply is normally specified by the peak to peak amplitude, and is made up of four AC components which can be identified:

- (1) Low frequency ripple at 2f being of the AC mains frequency.
- (2) High frequency ripple due to Pulse Width Modulation (PWM) to obtain the required line and load regulation.
- (3) The switching noise that has the same frequency of the switching PWM.
- (4) The aperiodic random noise that is not related to the AC source frequency and/or the switching frequency.

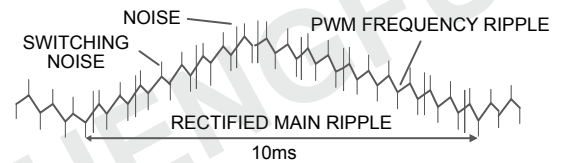


fig.1

6. Multi-output power supplies: For power supplies with multi-output, in our catalog it shows the maximum output current of each output. But the total power of all outputs shall not exceed the rated power of the series. For multi-output products, normally V1 is isolated from the other output(s). To make it common grounded, just connect +/- (accordingly) of V1 to the common connector of the other output(s).

7. Battery charger: Most of our single output power supplies above 100W can be directly used as battery charger by means of floating charge (constant current limiting).

8. Operating temperature: means the surrounding temperature of the power supply when it is working. If it is installed inside the case of an equipment, it means the temperature of the case inside, not the indoor or outdoor temperature. Therefore, if the operating temperature exceeds rated range, we suggest that the practical usable power should be derated by 2%/°C from the rated value or necessary cooling measurements should be taken to meet the required operating temperature.

9. Mean time between failures (MTBF): is the predicted elapsed time between inherent failures of a system during operation. MTBF can be calculated as the arithmetic mean (average) time between failures of a system, according to MIL-HDBK-217F formula. MTBF is normally used to evaluate the reliability of a product.

10. Torque of screw driver: normally max. 0.5N.m to connect wires into the screw terminal blocks.

Warranty Policy (保修条例) :

(1) Products found to be defective within 30 days from the date of receipt can be returned for credit or exchange. Contact us for further information on credit or a RMA number. After the initial 30 days, we will repair the goods according to our warranty period. Defective units should be shipped as "freight prepaid" to us and we will repair and return the goods with your next order. Within first 2 years, the repairing is free of charge. From 3rd to 5th year (some products), reasonable charge will be collected for defective components replaced. If the warranty period has expired, a repair fee (min. 40% of the original purchase price) will be charged.

(2) If customers do the repair by themselves, we can provide reasonable quantity of free components for repairing purpose.

(3) If customers can't send back the defective units or provide the pictures of defective units showing the serial number, the supplier shall reserve the right not to accept the claim.



Hengfu Corporation is the leading manufacturer of industrial switching power supplies in China. We have been supplier for Beijing Olympic Games, 60th National anniversary ceremony and Shanghai Expo2010. The company is ISO9001 certified by SGS and over 50 product series have acquired UL,TUV, CB, CE, CCC approval. Only top brand international components are adopted for the key parts. Our countrywide 15 branch offices and worldwide distributors are ready to offer you professional technical support and prompt service.

More information, please visit

www.hengfu.com



衡孚企业 Hengfu Corporation

上海市松江区新加路258号(总部)

258 Xinjia Road

Songjiang District, Shanghai 201611, China

Tel/Fax: 86 21 64950078

服务热线: 400-889-1788

安徽衡孚电子科技有限公司

安徽省宣城市创业路39号

39 Chuangye Road

Xuancheng 242099, Anhui Province

Tel/Fax: 86 563 2020388

