

**20W Battery Charging Power Supply**
**HF20W-SB Series**

**FEATURES**

- Universal AC input / full range
- To charge lead acid battery by floating charge
- Auto switch when power off (UPS function)
- AC mains failure signal
- Battery low signal
- Battery +/- pole reverse connection protection
- Approvals: CE
- Protections: overload/ over voltage/ short circuit
- 5 years limited warranty
- F602 111 x 78 x 36mm

**SPECIFICATIONS**

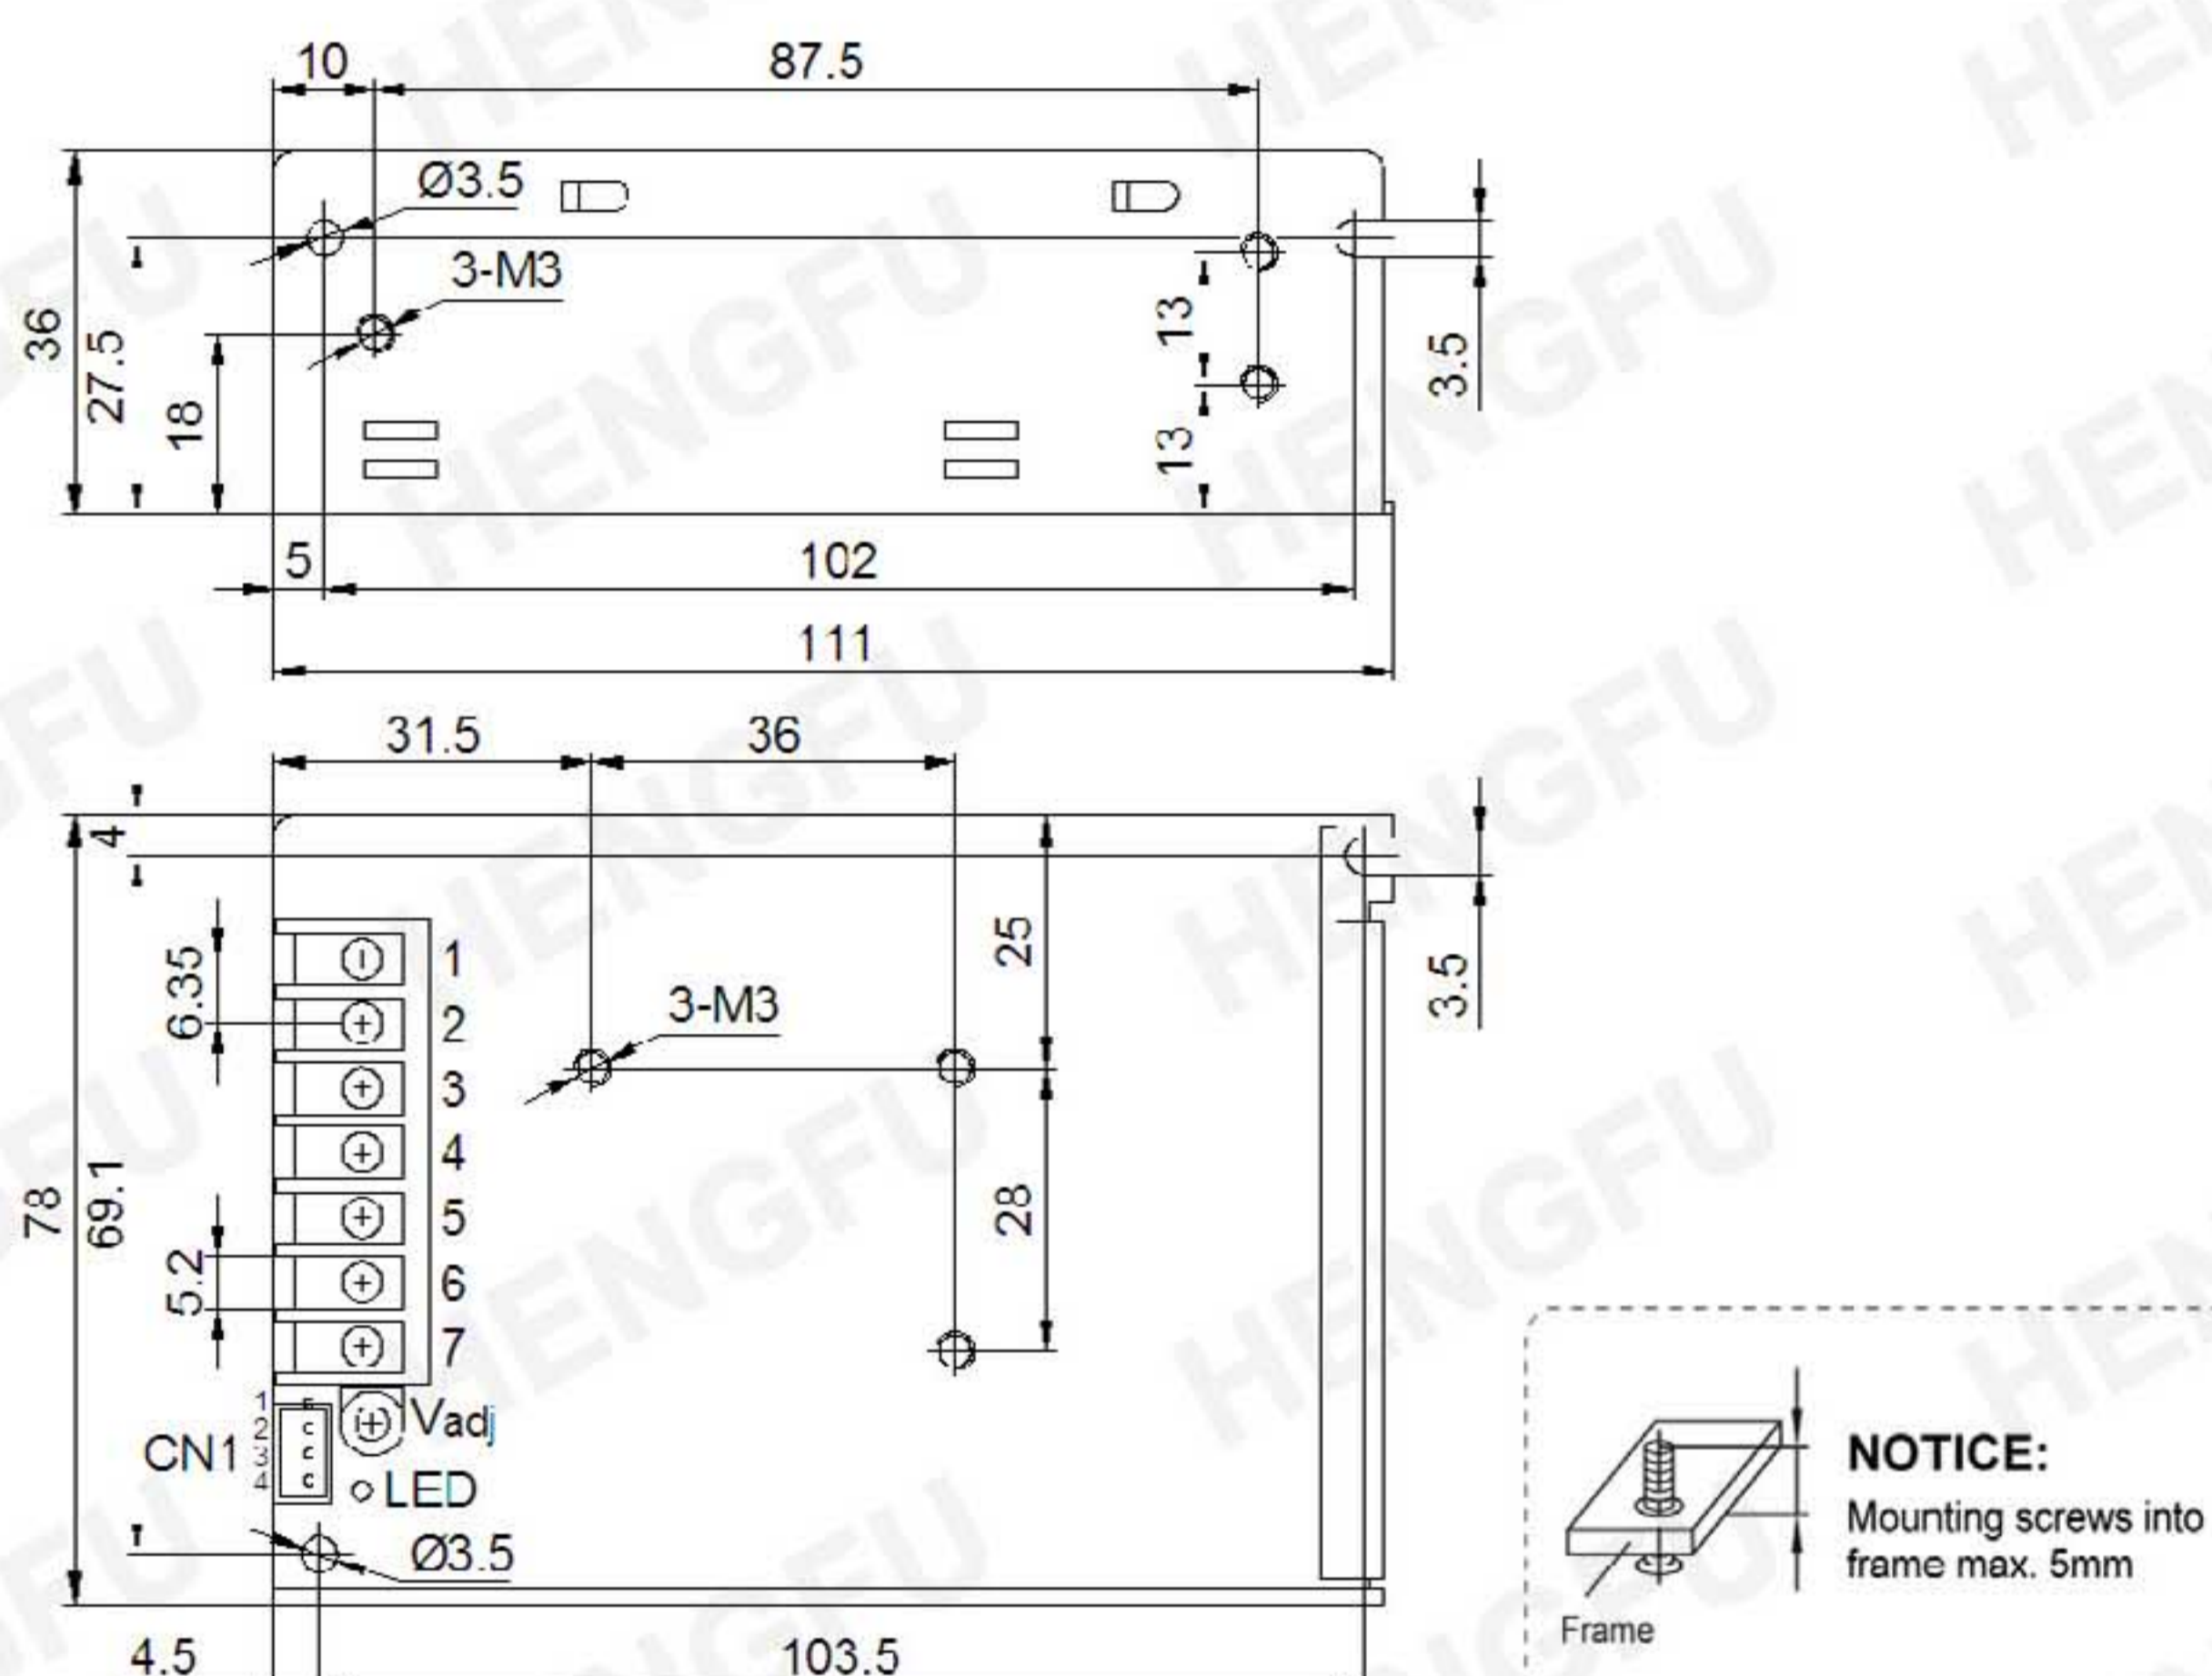
Input Voltage	85~264VAC (120~370VDC)
Input Current	0.8A
Input Frequency	47~63Hz
Inrush Current	cold start, 15A/115V, 30A/230V
Input Leakage Current	< 1mA/230VAC
Line Regulation (full load)	± 0.5%
Voltage Adjust Range	V1: ± 5%, V2: not adjustable
Output Overload Protection	110-200%, hiccup mode, auto recovery
Output Over Voltage Protection	115~150%, hiccup mode, auto recovery
Short Circuit Protection	hiccup mode, auto recovery
Rise Time	50ms @full load (typical)
Hold up Time	20ms @full load (typical)
Mechanical Feature	metal enclosed
DC output Indication	green LED on when DC output available
Dimensions	111 x 78 x 36mm (L x W x H)

Operating Temperature	-20°C ~+70°C(ref. derating curve)
Storage Temperature	-20°C ~+85°C
Operating Humidity	20%~93%RH(non condensing)
Storage Humidity	20%~95%RH(non condensing)
MTBF	>100,000 hours
Cooling	convection
Safety Standards	GB4943, UL60950, EN60950
EMC Standards	GB9254, EN55022 Class B EN55024, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11
Withstand Voltage	I/P -O/P: 3.0KVAC/1min I/P - PE: 1.5KVAC/1min O/P-PE: 0.5KVAC/1min
Vibration	10~150Hz, 2G 10min/1cycle, 30min each along X, Y, Z axes
Connection	7P/6.35mm pitch terminal block
Signal Output CN1 (refer to drawing)	4P/2.54mm
Packing	0.20kgs, 60pcs/14kgs/0.030CBM per carton

Model No.	DC Output	Voltage Adjust Range	Voltage Tolerance	Charging Current	Battery Low Voltage Protection	Ripple & Noise (max.)	Efficiency
HF20W-SB-12	12V 1.5A	± 5%	±1%	0.5A	9.6V ± 0.5V	120mVp-p	70%
	13.8V 0.5A (charger)	not adjustable	±3%				
HF20W-SB-24	24V 0.7A	± 5%	±1%	0.2A	19.6V ± 0.5V	150mVp-p	68%
	27.1V 0.2A (charger)	not adjustable	±3%				

**NOTE**

1. All parameters are measured at 230VAC input, rated load and 25°C ambient temperature.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
5. The power supply is regarded as a component which will be installed into the final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

**Drawing**

**Derating Curve**
